

**FLORIDA DEPARTMENT OF TRANSPORTATION**



**BRIDGE LOAD RATING MANUAL**

**Office of Maintenance**

Table of Contents

August 2012

**1 Introduction ..... 1**

    A. Load Rating and Inspection ..... 1

        A. Volume 1 - Bridge and Other Structures Inspection and Reporting Procedures Manual ..... 1

        B. Volume 2 - Bridge Maintenance Repair Methods Handbook ..... 1

        C. Volume 3 - Bridge Underwater Operations Manual ..... 1

        D. Volume 4 - Moveable Bridge Operations ..... 1

    B. Objectives ..... 1

    C. Quality Assurance Review of Load Ratings and Decision to Update Load Ratings ..... 1

**1.C.1 General Requirements ..... 1**

**1.C.2 Specific Check and Review Required ..... 2**

**1.C.2.1 Computer Programs ..... 2**

**1.C.2.2 Checking ..... 2**

**1.C.2.3 Review ..... 2**

**1.C.2.4 Quality Assurance Review ..... 2**

**1.C.2.5 Reanalysis ..... 2**

**1.C.2.6 Load Rating File ..... 2**

**1.C.2.7 Bridge Management System Data ..... 3**

**1.C.2.8 Quality Control Plan ..... 3**

**1.C.2.9 Decision to Update the Load Rating Based on Inspection Reporting ..... 3**

**2 Load Rating Process ..... 1**

    A. General ..... 1

    B. Concepts ..... 1

**2.B.1 New Bridges ..... 2**

**2.B.2 Existing Bridges ..... 5**

**2.B.3 Widened and Rehabilitated Bridges ..... 5**

**2.B.4 Temporary bridging: ..... 7**

**3 Working Responsibilities ..... 1**

    A. District Structures Maintenance Office ..... 1

    B. Office of Maintenance ..... 2

    C. State Structures Design Office ..... 2

**4 Utilization of Consulting Engineer ..... 1**

    A. General ..... 1

    B. Controls ..... 1

    C. Consultant Qualifications ..... 1

**5 Data Collection ..... 1**

Table of Contents

August 2012

- A. General..... 1
- B. Existing Plans..... 1
- C. Inspection Reports ..... 1
- D. Other Records..... 1
- 6 Load Rating Analysis..... 1**
- 6.0 Overview of Load Rating Methods and Procedures ..... 1
- 6.1. SCOPE..... 1
- 6.1.3. Evaluation Methods..... 1
- 6.1.5. Component Specific Evaluation ..... 2
- 6.1.5.3. Diaphragms..... 2
- 6.1.5.4. Support for Expansion Joint Devices ..... 2
- 6.1.5.5. Anchorages for Post-Tensioning Tendons..... 3
- 6.1.5.6. Post Tensioned Concrete Beam Splices within a Span..... 3
- 6.1.5.7. Post Tensioned Concrete Beam Dapped Hinges within a Span ..... 3
- 6.1.5.8. Bascule Bridges ..... 4
- 6.1.5.9. Gusset Plates on Truss Bridges ..... 4
- Part A – Load and Resistance Factor Rating ..... 5**
- 6A.1 Introduction ..... 5
- 6A.1.5 Load and Resistance Factor Rating ..... 5
- 6A.1.5.1 Design Load Rating ..... 5
- 6A.1.5.2 Legal Load Rating..... 6
- 6A.2 Loads for Evaluation ..... 6
- 6A.2.3.1 Vehicular Live Loads (Gravity Loads): LL..... 6
- 6A.3 Structural Analysis ..... 6
- 6A.3.1 General ..... 7
- 6A.3.2 Approximate Methods of Structural Analysis..... 7
- 6A.3.3 Refined Methods of Analysis ..... 8
- 6A.4 Load Rating Procedures ..... 8
- 6A.4.2 General Load Rating Equation ..... 8
- 6A.4.2.2 Limit States ..... 9
- 6A.4.2.3 Condition Factor ..... 10
- 6A.4.2.4 System Factor..... 10
- 6A.4.4 Legal Load Ratings..... 12
- 6A.4.4.1 Purpose..... 12
- 6A.4.4.2.1 Live Loads ..... 12

Table of Contents

August 2012

6A.4.4.2.3 Generalized Live Load Factors:  $\gamma_L$  ..... 15

6A.4.5 Permit Load Ratings ..... 15

    6A.4.5.1 Background ..... 15

    6A.4.5.2 Purpose ..... 15

        6A.4.5.4.2 Load Factors ..... 15

        6A.4.5.4.2a Routine (Annual) Permits ..... 16

6A.5 Concrete Structures ..... 16

    6A.5.2 Material ..... 16

    6A.5.4 Limit States ..... 16

        6A.5.4.1 Design-Load Rating ..... 16

**FDOT Table 6A.5.4.1-1 Stress Limits for Pre-stressed Concrete Bridges** ..... 17

        6A.5.4.2 Legal Load Rating and Permit Load Rating ..... 18

            6A.5.4.2.2a Legal Load Rating ..... 18

            6A.5.4.2.2b Permit Load Rating ..... 18

    6A.5.6 Minimum Reinforcement ..... 18

    6A.5.8 Evaluation for Shear ..... 18

    6A.5.10 Temperature, Creep and Shrinkage Effects ..... 19

    6A.5.11 Rating of Segmental Concrete Bridges ..... 19

        6A.5.11.2 General Rating Requirements ..... 19

6A.6 Steel Structures ..... 20

    6A.6.4 Limit States ..... 20

        6A.6.4.1 Design-Load Rating ..... 20

    6A.6.13 Fracture-Critical Members (FCMs) ..... 21

    6A.6.14 Double-Leaf Bascule with Span Locks ..... 21

Appendix A6A - Load and Resistance Factors Rating Flow Chart ..... 21

Appendix B6A - Limit States and Load Factors for Load Rating ..... 21

Appendix D6A - AASHTO Legal Loads ..... 21

Appendix J6A - Rating of Segmental Concrete Box Girder Bridges Step-By-Step Supplement ..... 22

    J6A.1 - Load Factors and Load Combinations ..... 22

    J6A.2 - Design Load Rating – Inventory ..... 23

    J6A.3 - Design Load Rating – Operating ..... 24

    J6A.4 - Legal Load Rating ..... 25

    J6A.5 - Permit Load Rating ..... 25

    J6A.6 - Capacity – Strength Limit State ..... 26

    J6A.7 - Allowable Stress Limits – Service Limit State ..... 26

Table of Contents

August 2012

J6A7.1 - Longitudinal Tension in Joints ..... 26

J6A.7.2 - Transverse Tensile Stress ..... 27

J6A.7.3 - Principal Tensile Stress – Service Limit State ..... 27

J6A.8 - Local Details ..... 27

**Part B – Allowable Stress Rating and Load Factor Rating ..... 27**

6B.1 General ..... 27

    6B.1.1 Application of Standard Design Specifications ..... 28

6B.5 Nominal Capacity ..... 28

    6B.5.3 Load Factor Method ..... 28

        6B.5.3.3 Pre-stressed Concrete ..... 28

6B.6 Loadings ..... 28

    6B.6.2.2 Truck Loads ..... 28

**7 POSTING OF BRIDGES AND POSTING AVOIDANCE ..... 1**

7.1 General ..... 1

7.2 Posting Avoidance ..... 1

**7.2.1 Dynamic Load Allowance (IM) for Improved Surface Conditions (Variance) ..... 2**

**7.2.2 Approximate and Refined Methods of Analysis (Variance) ..... 2**

**7.2.3 Shear Capacity by AASHTO LRFD for Segmental Box Girder Bridges (Variance) ..... 3**

**7.2.4 Existing Bridge Inventory Before January 2005 (Variance) ..... 3**

**7.2.5 Principal Tension – Segmental Concrete Bridges (Box Girders) (Variance) ..... 3**

**7.2.6 Stiffness of Traffic Barrier (Exception) ..... 4**

**7.2.7 Segmental Concrete Box Girder – Longitudinal Tension in Epoxy Joints (Exception) ..... 4**

**7.2.9 Concrete Box Girder – Principal Tensile Stress (Exception) ..... 5**

**7.2.10 Reduced Structural (DC) Dead Load (Exception) ..... 6**

7.3 Procedures for Posting of Weight Restrictions on Department Maintained Structures ..... 6

7.4 Procedures for Posting Weight Restrictions on Local Government Structures ..... 10

**8 Load Testing of Bridges ..... 1**

8.2 General ..... 1

8.3 Load Test Candidate ..... 1

8.4 Load Test Reports ..... 2

**9 Permitting Operations ..... 1**

**10 Summary of Ratings ..... 1**

**Appendix A - LOAD RATING SUMMARY TABLES ..... 1**

Page No. .... 1

Title – LRFR Load Rating Summary Table ..... 1

Table of Contents

August 2012

Reinforced Concrete Bridges (Part A)..... 1

Reinforced Concrete Bridges (Part B)..... 1

Prestressed Concrete Bridges (Part A)..... 1

Prestressed Concrete Bridges (Part B)..... 1

Steel Girder Bridges (Part A) ..... 1

Steel Girder Bridges (Part B) ..... 1

Continuous Post-Tensioned I-Girder Bridges (Part A)..... 1

Post-Tensioned Concrete Box Girder Bridges (Part A) ..... 1

Reinforced Concrete Bridge Culverts (Part A) ..... 1

Reinforced Concrete Bridge Culverts (Part B) ..... 1

## 1 Introduction

### A. Load Rating and Inspection

The load rating process is a component of the inspection process and consists of determining the safe load carrying capacity of structures, determining if specific legal or overweight vehicles can safely cross the structure and determining if a structure needs to be restricted and the level of posting required. During and as a result of each inspection, the Districts will determine if the load rating on file reflects the current capacity of the bridge and will update the rating in Pontis if necessary. The bridge management system consists of the following volumes:

- A. **Volume 1 - Bridge and Other Structures Inspection and Reporting Procedures Manual;** (Topic No. 850-010-030). Specifically defines standards for inspection and reporting practices.
- B. **Volume 2 - Bridge Maintenance Repair Methods Handbook;** defines standard maintenance and repair details including repair equipment, material and manpower.
- C. **Volume 3 - Bridge Underwater Operations Manual;** (Topic No. 850-010-011) defines the procedures and safety requirements for diving operations to perform underwater bridge inspections. (Note: This manual is currently referred to as the Dive Manual.)
- D. **Volume 4 - Moveable Bridge Operations;** (Topic No. 850-010-032) defines the organization, responsibilities and functions involved in bridge inspection, maintenance and operations.

### B. Objectives

The objectives of this Manual are to codify the procedures and to detail the concepts for the load rating, posting and permitting process. Specific examples of load rating are not included.

### C. Quality Assurance Review of Load Ratings and Decision to Update Load Ratings

#### 1.C.1 General Requirements

The mission of the department is to provide a safe transportation system that ensures the mobility of people and goods. The load rating process recognizes a balance between safety and economics. Both in-house and consultants' load rating results should be checked for accuracy as part of the quality control process. Specifically when the rating for a new bridge is marginal, the rating should be reviewed to determine the reason(s). If the consultant performs the rating, he or she should provide in writing the reason(s) why the rating is marginal. The following reasons are the most commonly recognized reasons for marginal ratings:

- a) The bridge has not been designed to its intended level
- b) Modifications were made during the construction that changed the bridge design level
- c) The load rating is inaccurate

## **1.C.2 Specific Check and Review Required**

### **1.C.2.1 Computer Programs**

Whenever possible, the load rater should perform long hand checks of a portion of the computer analysis to satisfy the load rater that the computer program is accurate. It is of utmost importance that the load rater understands when computer results are reasonable. Blind faith in any computer program should be avoided.

### **1.C.2.2 Checking**

An independent check of the analysis shall be performed. When computer programs are used, the checker should verify all input data, verify that the summary of load capacity information accurately reflects the analysis, and be satisfied with the accuracy and suitability of the computer program.

### **1.C.2.3 Review**

The analysis must be performed under the supervision of a Professional Engineer. If the load rater is not a Professional Engineer, then the Professional Engineer in charge must review the work for accuracy and completeness.

### **1.C.2.4 Quality Assurance Review**

Each year, the Office of Maintenance will perform quality assurance review of the load rating performance for each District. The current schedule, monitoring plan and critical requirements and compliance indicators are included in the Quality Assurance Plan available on the Office of Maintenance website.

### **1.C.2.5 Reanalysis**

When the condition of a structure changes a reanalysis of the structure may be required. Conditions that may require reanalysis are; structural deterioration, damage due to vessel or vehicular hits, modifications to the structure or specification changes. Every bridge inspection report and accident report should be reviewed by a person knowledgeable in load rating concepts to determine if reanalysis is required. All bridge inspection reports are to be reviewed by the load rating section. The District Quality Control Plan shall include a method to document that this review is performed for every routine bridge inspection event.

### **1.C.2.6 Load Rating File**

Computer input and output files, hand calculations, field measurements, catalogs and other pertinent information, used in performing load rating, shall be stored in the load rating file. This will provide easy access for reviewing or revising the load rating.



### **1.C.2.7 Bridge Management System Data**

The accuracy of this data is vital to the operation of the Overweight/Over-dimensional Road Use Permit Office (Permit Office). Therefore, the load rating section will obtain an output of the Comprehensive Inventory Data Report (CIDR) after the inspection report has been reviewed. If no reanalysis is required, the load rating section will verify the load rating data for Items 67 and 48. After reanalysis, the load rating section will either update the database or provide the person responsible for updating the database with the proper values and back check the data after the database has been updated.

### **1.C.2.8 Quality Control Plan**

The District shall have a quality control plan in place including quality assurance review of consultants if consultants perform the Quality Control of load ratings. The plan shall include clear recommendations for determining if a bridge load rating needs to be updated during each inspection cycle. The maximum time allowed to update the rating past the date the inspection report is signed is 60 days for simple bridges and 90 days for more complex bridges. Exception to this requirement should be made in writing to the State Load Rating Engineer no later than 30 days after the inspection report is signed. The request for exception shall clearly state why the bridge load rating cannot be timely updated. The Pontis Database should be updated within 14 days of the time the load rating is accepted by the Department. The Department will notify the agencies within 1 week after a need for posting is identified.

### **1.C.2.9 Decision to Update the Load Rating Based on Inspection Reporting**

The District shall track dates at which re-load rating is required based on inspections.

### **C1.3.2.9 Decision to Update the Load Rating Based on Inspection Reporting**

To clarify, this is not the date at which the load rating is being performed. As a default date, use the date the inspection report is dated, signed and sealed. If the date for the decision to re-load rate occurs before the inspection report is dated, signed and sealed, use the latter date.

## 2 Load Rating Process

### A. General

Florida Administrative Code 14-15.002, *Manual of Uniform Standards for Design, Construction, and Maintenance for Streets and Highways* (Commonly known as the "*Florida Greenbook*") requires load rating for all bridges in Florida.

The specifications governing this work is the current version of the *MBE*, published by AASHTO and as modified by this Manual. The District Maintenance Engineer and appropriate staff are responsible to ensure that every bridge structure within their jurisdiction is properly load rated.

### B. Concepts

The following concepts are to be applied to the load rating process:

- a) Substructures generally do not control the load rating. However, after the superstructure has been load rated, the load rater shall determine if the substructure can carry an equivalent or greater load than the superstructure. If not, the substructure will be load rated and the load rating adjusted. A complete or partial analysis of the substructure is not required if, in the engineering judgment of the load rater, the substructure has equivalent or greater capacity than the superstructure. The load rater must be aware that short span bridge capacity based upon superstructure evaluation may allow vehicles with weights exceeding 500,000 lbs to cross generating significant impact on the substructure.
- b) Reinforced concrete bridge decks on redundant, multi-girder bridges will not normally be rated unless damage, deterioration, or other reasons merit this analysis. All other bridge deck systems shall be rated.

- c) Utilizing engineering judgment, all superstructure spans and components of the span shall be load rated for both moment and shear until the governing component is established. For example, a two girder superstructure system with floor beams and stringers would require the rating of stringers, floor beams and girders to establish the governing component. If the engineer, using engineering judgment determines that certain components will not control the rating, then a full analysis of the non-controlling elements is not required. Typically, certain components such as barriers or joints are not load rated.
- d) For most bridges, the governing rating shall be the lesser of the shear capacity or moment capacity of the critical component. For more complex structures, other stresses such as principal web tension in concrete post-tensioned segmental bridges at service limit states will be investigated.
- e) Some composite pre-stressed concrete girder bridges were designed with the deck continuous over the supports in order to eliminate transverse deck joints. The girders of these bridges were not made continuous over the support. Bridges meeting this description shall be load rated as simple spans.
- f) The AASHTO supported software VIRTIS is the preferred load rating program to load rate all bridges that meet the bridge configurations and capabilities of the program. For additional comments, see Section 6A.1.6.
- g) When consultants perform load ratings, they will follow the requirements of this **Manual** and the current version of the **MBE**. The district load rating staff will review the consultant's load ratings and perform spot checks to confirm accuracy of the consultant's work. Consultant load ratings shall be signed and sealed by a professional engineer. The consultant shall have quality control procedures in place to assure the accuracy and completeness of the load ratings.

### 2.B.1 New Bridges


- a) When load rating structures, perform a *LRFR* load rating analysis as defined in the *MBE* and as modified by this *Manual*.
- b) For new bridges the Engineer of Record shall load rate the bridge(s) and submit the calculations and Load Rating Summary Tables for the entire structure with the 90% plan submittal for the project.

## 2– Load Rating Process

August 2012

- c) The bridge owner shall perform a load rating for the as-built changes (if any) and provide the Department with the completed Bridge Load Rating Summary Table within 90 or 180 days of opening for on-system or off-system bridges, respectively. The bridge owner should consider requiring the engineer of record to perform the load rating.
- d) Load rate bridge-size culverts (see definition in *PPM* Volume 1, Chapter 33,) in accordance with this *Manual* and *SDG* 3.15. Calculations must be signed and sealed by a professional engineer currently approved to perform Minor Bridge Design under Rule 14-75 of the Florida Administrative Code.
- e) Cast-in-place culvert load ratings must be performed by the licensed professional engineer designer. Show the load rating summary in the Contract Plans. Precast culverts must be load rated by the Contractor's Engineer of Record (see definition in the Construction Specifications Section 102) and the load rating shown on the approved shop drawings, unless otherwise provided on the Design Standards, Index No. 292.
- f) See Figure 2.2.1-1 for load rating flowchart.

**FDOT Figure 2.2.1-1 Flowchart for Load Rating**

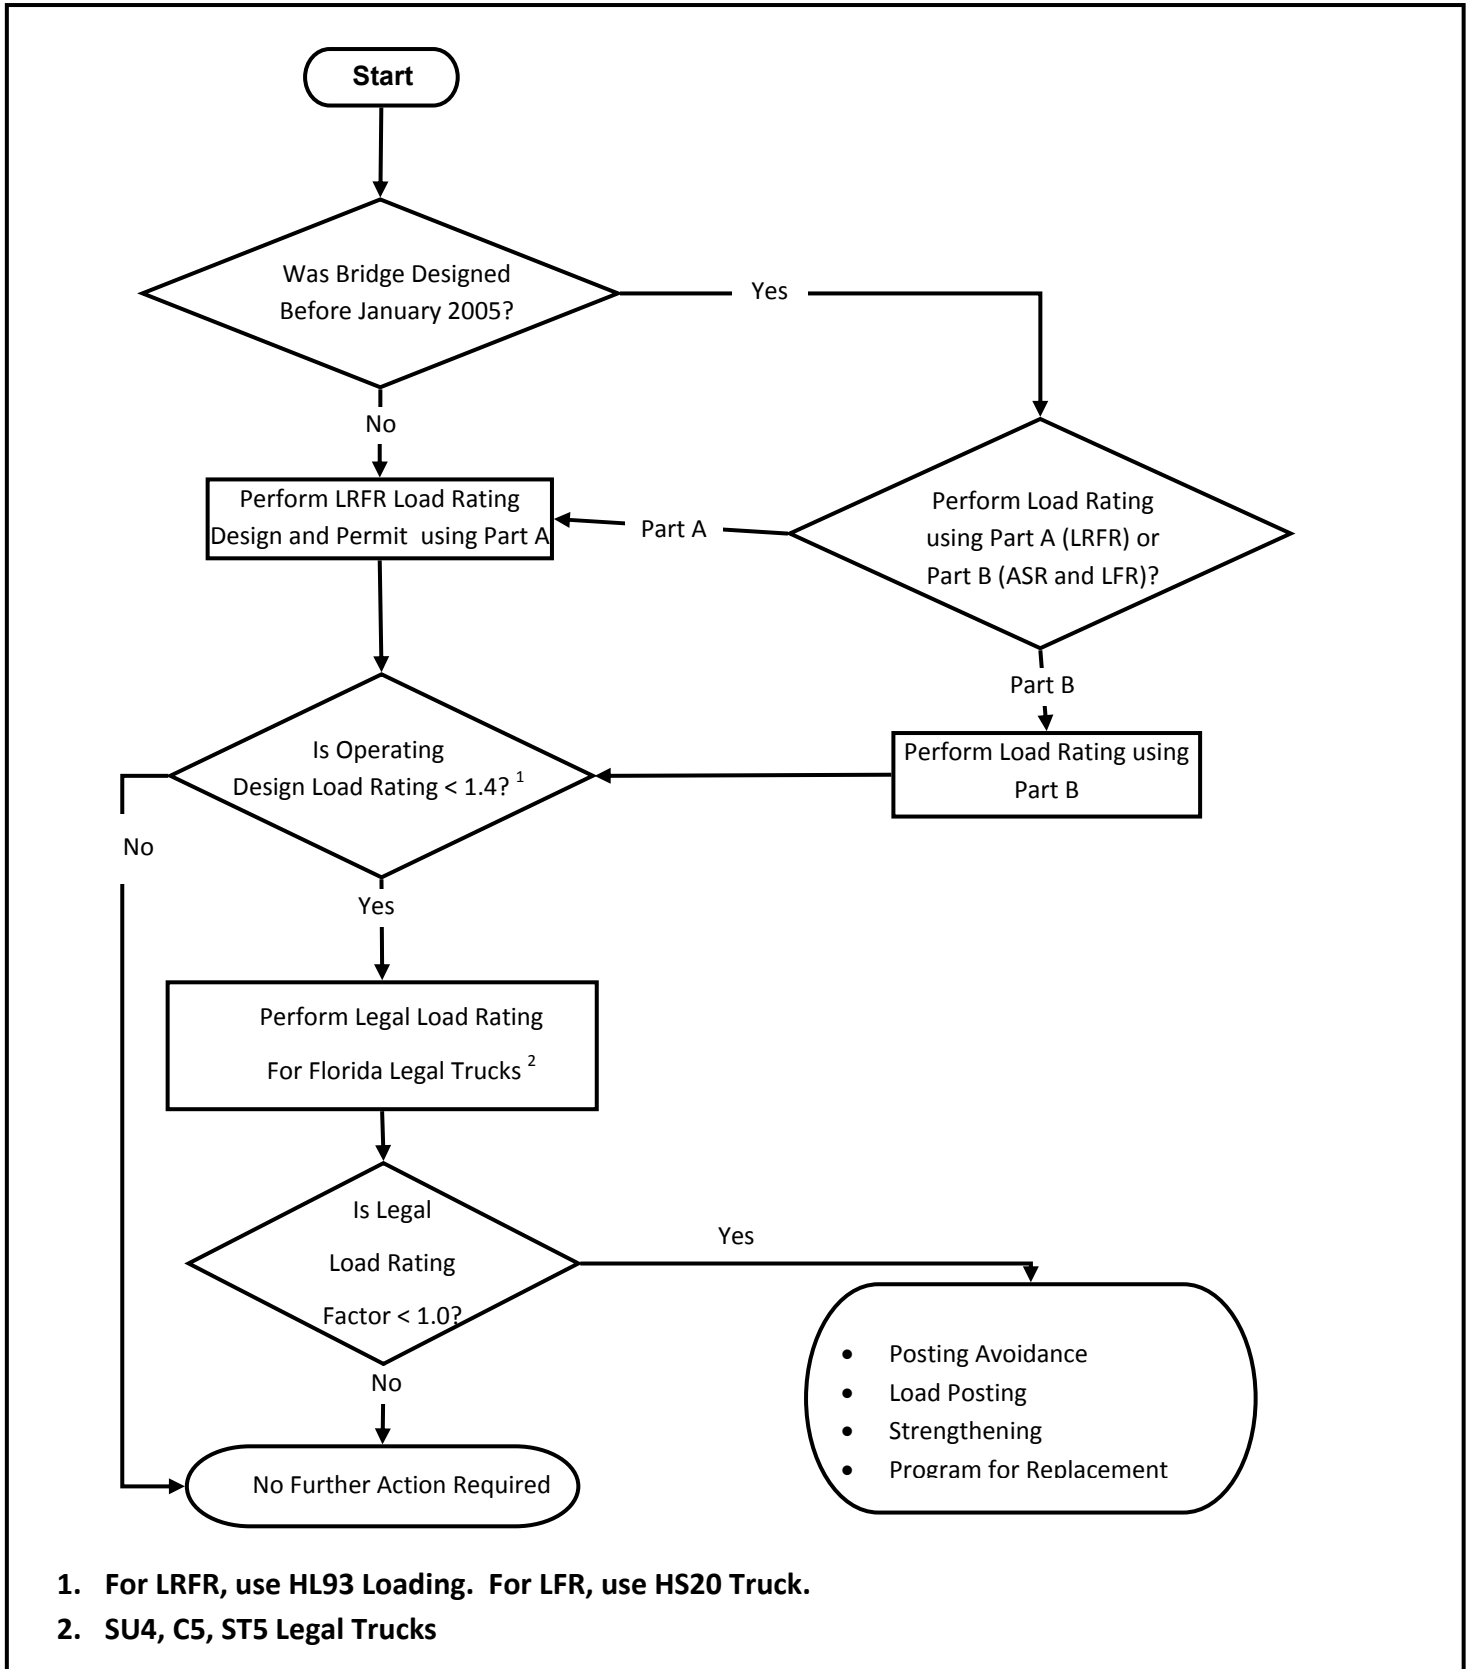

### 2.B.2 Existing Bridges

The *LRFR* method is the preferred method of analysis. Load Factor Rating (*LFR*) may be used for existing structures not designed using the *LRFD* method.

Deck panel systems which are in poor condition (exhibiting either transverse or longitudinal spalling or significant cracking), shall have the live load distribution factors established as if the deck slabs act as simple spans between girders.

Load ratings for existing bridges must be performed using the load factor, load test or the load and resistance factor rating methods. An existing load rating performed with load factor does not have to be reanalyzed with newer methods.

When an existing bridge with a working stress load rating requires reanalysis that structure should be reanalyzed with load factor or load resistance factor rating methods.

See Figure 2.2.1-1 for load rating flowchart.

Posting avoidance strategies through the use of variances and exceptions are given in Section 7.

### 2.B.3 Widened and Rehabilitated Bridges

Prior to developing the scope-of-work for bridge widening and/or rehabilitation projects, the Department or their consultant will review the inspection report and the existing load rating to determine the suitability of the bridge project.

If the existing load rating is inaccurate or was performed using an older method (e.g. Allowable Stress or Load Factor), perform a new load rating of the existing bridge in accordance with this *Manual*. Design all bridge widening or rehabilitation projects in accordance with *SDG 7.3*. If the bridge to be widened/rehabilitated does not have a design load rating (inventory, *LFR* and *LRFR*) and a FL 120 permit load rating (Strength and Service when applicable) (*LRFR* only), greater than or equal to 1.0, regardless of the specification used, replacement or strengthening is required unless a Design Variation is approved.

If the widening or rehabilitation of a bridge does not produce a *LRFR (Part A)* design inventory rating factor and a FL 120 (Strength and Service when applicable) permit rating factor greater than or equal to 1.0, calculate and report the appropriate rating factor using *LRFR (Part B)* and send a copy of the Load Rating Summary Table to the State Structures Design Office. If the load rating at inventory level using *LRFR (Part B)* yield an inventory rating factor of less than 1.0, a revised load rating using one of the additional procedures in C.1, C.2, C.3, or C.4

### C2.2.2

Unless there is a change in condition of the bridge, an existing load rating using allowable stress method or load factor design is not required to be load rated with *LRFR*.

## 2– Load Rating Process

may be performed to obtain a satisfactory inventory rating. Submit a Design Variation for use of the additional methods of analysis or for an inventory load rating factor of less than 1.0 to the State Structures Design Engineer.

**Approximate Method of Analysis:** When using an approximate method of structural analysis defined in the specifications along with the AASHTO defined live load distribution factors, a rating factor of 0.95 may be rounded up to 1.0.

**Refined Method of Analysis:** Refined methods of structural analyses, as discussed in Section 6A.3.3, may be performed in order to establish an enhanced live load distribution and improved load rating. For continuous post-tensioned concrete bridges, a more sophisticated, time-dependent construction analysis is required to determine overall longitudinal effects from permanent loads (e.g. BD 2 analysis).

**Shear Capacity - Segmental Concrete Box Girder - Crack Angle *LRFD* (LRFD 5.8.6):** To calculate a crack angle more accurately than the assumed 45 degree angle used in the specifications, use the procedure found in Appendix B of "Volume 10A Load Rating Post-Tensioned Concrete Segmental Bridges" (dated Oct. 8, 2004) found on the Structures Design Office website.

See **Figure 2.2.3-1** for a flow chart of the widening/rehabilitation decision making process.

The final load rating for a bridge widening must use a consistent load rating method for both the existing and widened portions of the bridge.

The Engineer of Record shall load rate the bridge(s) and submit the calculations and Load Rating Summary Tables for the entire structure with the 90% plan submittal for the project.

The bridge owner shall perform a load rating for the as-built changes (if any) and provide the Department with the completed Bridge Load Rating Summary Table within 90 or 180 days of opening for on-system or off-system bridges, respectively. The bridge owner should consider requiring the engineer of record to perform the as-built load rating.

Lengthening of bridge culverts shall be load rated as specified in Section 2.2.1.D and 2.2.1.E.

**2.B.4 Temporary bridging:**

When temporary bridging (Acrow, Mabey, etc) is opened to traffic at a site, the District Structures Maintenance Engineer or his/her designee shall ensure that posted signs are installed to restrict permitted overweight vehicles. The signs should state “Legal Weight Only”.



### 3 Working Responsibilities

#### A. District Structures Maintenance Office

The responsibilities of the District Structures Maintenance office are:

- a) Perform load ratings.
- b) Administer consultant contracts performing load ratings. Review load ratings prepared by consultants for new and existing bridges.
- c) Enter results of load ratings into the database and Section D (Load Rating) of the Bridge Record. Final load ratings should be entered into the database within 90 days of final Acceptance by Construction for State bridges and 180 days for Local Government bridges. All Districts shall obtain the initial design load rating performed at 90% of the Design phase from the Engineer of Record and enter the data in Pontis within 14 days from acceptance by construction. If no initial Design Load rating is available, or if the District deems the load rating not to be applicable to the current condition, the bridge will be restricted to legal load traffic and no permitted vehicles will be permitted to cross. In case the District recommends that overweight vehicles cross a bridge for which no load rating is provided yet, the District shall contact the EOR and provide to the Office of Maintenance and the State Load Rating Engineer a written notification of the temporary load rating recommendations. In this case for bridges load rated using the *LRFR* method, FL120 rating will be provided. For bridges rated with any other method, a temporary HS20 rating will be provided at the operating level. When changing conditions require a new load rating, the new load rating data should be entered into the database within 90 days for state bridges and 180 days for local government bridges. Districts should make every attempt to incorporate the load rating performed at the end of the design phase into the Bridge Database (Pontis) before the bridge is opened to traffic to enhance mobility.
- d) Recommend bridges to be load tested to the Office of Maintenance for coordination and prioritization.
- e) For State bridges, immediately inform the Office of Maintenance and the State Load Rating Engineer in writing of any decrease in load rating capacity (HS20 operating rating level for all rating methods excluding *LRFR*, and FL120 for *LRFR*) exceeding 5% of the original value. Update the capacity information in the bridge database (Pontis) immediately.

**3– Working Responsibilities**

- f) Initiate requests for load postings and removal of load postings. This includes verification that the maintaining agency has properly posted the structure, or removed all signage.
- g) Maintain bridge design plans, as-built plans and shop drawing inventory.
- h) Review bridge inspection reports to determine when reanalysis is required.
- i) Once a year, in a format acceptable to the Office of Maintenance, update and maintain the district bridge maps and provide copies to the Office of Maintenance.
- j) Provide information to the Overweight/Over-Dimensional Road Use Permit Office to determine potential conflicts of a temporary nature to moving oversized/overweight vehicles (see Section 9).

**B. Office of Maintenance**

The responsibilities of the Office of Maintenance are:

- a) Perform quality assurance reviews.
- b) Establish procedures.
- c) Provide training.
- d) Assist Districts and Overweight/Over-Dimensional Road Use Permits Office when requested.
- e) Act on software computer program malfunctions for VIRTIS.
- f) Inform Districts of new procedures and concerns.
- g) Review load posting and load posting removal requests.

**C. State Structures Design Office**

The responsibilities of the State Structures Design Office are:

- a) Assist the Office of Maintenance in resolving inconsistencies between the *Structures Manual* and this Manual.
- b) Propose analysis programs.
- c) Address software malfunctions in software approved by the State Structures Design Office.
- d) Quality Assurance review based on new proposed software or methods.

## **4 Utilization of Consulting Engineer**

### **A. General**

Consultants may be used for load rating state owned bridges when in-house resources are lacking. Consultants are used to load rate local agency bridges as part of the local government bridge inspection contracts. If conditions are found during the consultant's inspection that would change the load rating of the structure, the Department's project manager may direct the consultant to determine a new load rating for the structure based on the results of the inspection.

### **B. Controls**

Consultants shall load rate structures in accordance with this Manual, the current version of the MBE, and other documents included and referred to in the contract. Those documents should be reviewed by the consultant to determine if any questions arise from using those manuals and procedures. Questions pertaining to load rating should be directed in writing to the Office of Maintenance, State Load Rating Engineer.

### **C. Consultant Qualifications**

For the load rating of routine structures the consultant must have experience in the design or load rating of bridges. For the load rating of complex structures, the consultant's engineer performing the load rating must have experience in designing that type of structure. Examples of complex structures are segmental concrete bridges, post-tensioned bridges, curved steel box girder bridges, curved steel girder bridges and trusses. If the consultant changes the individual or individuals performing the load rating of a complex structure, the new individual must be approved by the Department's project manager.

## **5 Data Collection**

### **A. General**

The first step is the collection of relevant existing data required to perform the load rating.

The following hierarchy of data will be used for load rating:

As-built plans to be supplemented with field measurements and bridge inspection reports

In the absence of as-built plans, design plans supplemented with field measurements and bridge inspection reports

In the absence of plans, field measurements and bridge inspection reports will be used.

### **B. Existing Plans**

Existing plans are used to determine loads, bridge geometry, section and material properties. Design plans (as-bid plans) are created by the designer and used as a contract document for bidding the job. Certain structures (generally flat slab bridges and culverts) are built from standard drawings. These standard drawings have been changed and revised over time. The specific standard drawings used for construction are generally identified in the roadway plans for the project under which the bridge was built. Construction record plans (as-built plans) are contract design plans which have been modified to reflect changes made during construction. Shop drawings are also useful sources of information about the bridge. Plans may not exist for some bridges. In these cases field measurements will be required.

### **C. Inspection Reports**

Inspection reports must be reviewed prior to load rating to determine if there is deterioration or other damage present that may change the carrying capacity of the structure and whether or not the load rating in the file is valid.

### **D. Other Records**

Other appropriate bridge history records, such as repair or rehabilitation plans, should be reviewed to determine their impact on the load carrying capacity of the structure.

## 6 Load Rating Analysis

The chapter numbers in this section are organized using the same chapter numbers of the *MBE* to quickly coordinate and associate this *Manual's* criteria with that of the *MBE*.

### 6.0 Overview of Load Rating Methods and Procedures

The load rating of existing structures shall be in accordance with Table 6.0-1. The order of preference in rating methodologies is:

**load and resistance factor rating (LRFR)**

**load factor rating (LFR)**

**allowable stress rating (ASR)**

### C6.0

Add the following:

In 1993 an agreement was reached between the FHWA and the FDOT concerning the use of allowable stress method for load rating bridges. In summary, the agreement states allowable stress rating is not permitted for bridges on the National Highway System if the bridge is either structurally deficient or functionally obsolete.

FDOT Table 6.0-1 Acceptable Load Rating Methodologies

DESIGN METHODOLOGY	LOAD-RATING METHODOLOGY <sup>1</sup>		
	Allowable Stress Rating-ASR (Part B)	Load Factor Rating LFR (Part B)	Load & Resistance Factor Rating-LRFR (Part A)
Allowable Stress Design (ASD)	√ <sup>2</sup>	√	√
Load Factor Design (LFD)		√	√
Load & Resistance Factor Design (LRFD)			√ <sup>3</sup>

The analysis shall include reference to the current version of the Structures Manual or Load Rating Manual.

Allowable stress rating is not permitted for bridges on the National Highway System if the bridge is either structurally deficient or functionally obsolete.

Bridges designed using the *LRFD* methodology before January 7, 2005 may be load rated using either the *LFR* or *LRFR* methodologies. For *LRFD* designs (January 7, 2005 and after), the Department will not allow the use of an alternative load rating methodology (Part B) or posting avoidance techniques, with the exception of curved steel bridges designed using the *LFD* method.

### 6.1. SCOPE

### C6.1

#### 6.1.3. Evaluation Methods

#### C6.1.3

The department does not specify specific software for the purpose of Load Rating because the choice of software is largely dependent on the type of analysis to be performed, the structure type, and an engineer's familiarity with the software package.

### 6.1.5. Component Specific Evaluation

Add the following:

Bridges may contain local details that must be appropriately designed to carry local loads or distribute forces to the main bridge components (beams). Although forces in these details can vary as a function of the applied live loads (with the exception of in-span beam splices), it is recommended that they not be included in the load rating. Rather, the capacities of such details should be checked only for critical loads or ratings and then only if there is evidence of distress (e.g. cracks).

#### 6.1.5.3. Diaphragms

The main purpose of transverse diaphragms is to provide lateral stability to girders during construction and wind loading.

Transverse diaphragms themselves need not be analyzed as part of a routine load rating. Only if there is evidence of distress (e.g. efflorescence, rust stains or buckling), or at the discretion of the engineer, should it be necessary to more closely consider the forces and stresses in a diaphragm.

The stiffness of any transverse diaphragms should be included, if significant and appropriate, in any finite element analysis program used to establish Live Load Distribution Factors.

#### 6.1.5.4. Support for Expansion Joint Devices

Expansion joint devices are usually contained in a recess formed in the top of the end of the top slab and transverse diaphragm. Occasionally, depending upon the need to accommodate other details, such as drainage systems, this may involve a corbel - usually as a contiguous part of the expansion joint diaphragm. It is not necessary to analyze such a detail for routine load rating. Only if there is evidence of distress (e.g. cracks, efflorescence or rust stains), or at the discretion of the engineer, should it be necessary to more closely consider the forces and stresses in such a detail.

### C6A.1.5

Add the following:

Important local details in concrete bridges include diaphragms and details, such as corbels, that support expansion joint devices and anchorages for post-tensioning tendons. The behavior of these details and the forces to which they are subjected may be determined by appropriate models or hand calculations. Analysis methods and design procedures are available in LRFD (e.g. strut and tie analysis).

### **6.1.5.5. Anchorages for Post-Tensioning Tendons**

Anchorage details are normally contained in a widened portion of the web at the ends of a beam. It is not necessary to analyze anchorage details for routine load rating. Only if there is evidence of distress (e.g. cracks, efflorescence or rust stains) should it be necessary to more closely consider the forces and stresses in such a detail itself.

Changes in the gross section properties at anchor block zones should be properly accounted for in any finite element analysis program used to establish principal tension/bursting.

### **6.1.5.6. Post Tensioned Concrete Beam Splices within a Span**

Beam splices within a span are frequently used to connect portions of continuous girders. Such splices usually require reinforcing bars projecting from the ends of the precast beams and into a reinforced, cast-in-place transverse diaphragm. Longitudinal post-tensioning ducts are connected and tendons pass through the splice.

Beam splices are typically near inflection points; consequently, live load effects may induce longitudinal tensile stress in the top or bottom. Therefore, the longitudinal tendons are approximately concentric, i.e. at mid-depth of the composite section. It is necessary to check longitudinal flexure and shear effects at in-span beam splices.

### **6.1.5.7. Post Tensioned Concrete Beam Dapped Hinges within a Span**

Dapped hinges are rarely used in beam bridges in Florida. Forces acting through dapped hinges within a span should be calculated for statically determinate structures or be determined as a part of the time-dependent construction analysis for indeterminate structures. Maximum live load reactions should also be calculated. Once all reaction forces are known, local analyses should be performed to develop the hinge forces into the main beam components using suitable strut-and-tie techniques. An alternate approach would be to develop three-dimensional finite element models to analyze the flow of forces.

### **6.1.5.8. Bascule Bridges**

Use the appropriate FDOT and *LRFR* system factors. Load rate the bridge for Design Inventory, Design Operating, and the FL120 permit vehicle assuming the span locks are engaged (driven) to transmit live load to the opposite leaf. In addition, for the Strength I Design Operating Rating, load rate the bridge assuming the span locks are not engaged to transmit live load to the opposite leaf. For both cases, assume the live load to be on the tip side (in front) of the trunnion.

Report the load ratings along with the span lock assumptions. Contact the District Structures Maintenance Engineer for directions on reporting the controlling load case and assumptions. Also load rate the span locks using the impact factors given in SDG 8.5.

### **6.1.5.9. Gusset Plates on Truss Bridges**

When evaluating new and existing truss bridges with gusset plates, follow FHWA Technical Advisory T 5140.29 "Load-carrying Capacity Considerations of Gusset Plates in Non-load-path-redundant Steel Truss Bridges."

### **C6.1.5.8**

Requiring a Strength I Design Operating load rating with the span locks removed provides a value that can be used to assess a worst case span lock condition with regard to the operation of the bridge.



## Part A – Load and Resistance Factor Rating

### 6A.1 Introduction

#### 6A.1.5 Load and Resistance Factor Rating

The routine FDOT rating process is shown in Section 2.2. Rate bridges designed January 2005 and after using *LRFR (Part A)*. For bridges other than pre-stressed concrete segmental box girders, designed before January 2005, use *LRFR (Part B)* for rating. For bridges designed using the *LFD* methodology before January 2005, *LRFR (Part A)* may be used as an alternative.

*Replace Figure 6-1, Flowchart for Load Rating, with FDOT Figure 2.2.3-1.*

##### 6A.1.5.1 Design Load Rating

Delete Paragraph 2 and replace with the following:

Design load rating can serve as a screening process to identify bridges that should be load rated for legal loads.

Bridges that have a design load rating factor equal to or greater than 1.4 at the operating level will have satisfactory load rating for all three Florida legal loads. The results are also suitable for NBI and BMS reporting.

#### C6A.1.5

The rating process of AASHTO *LRFR* suggests that each permit vehicle be evaluated individually. Such is not the case with FDOT or with most other States. Traditionally, annual blanket permits were issued based upon a comparison of force effects of the permit vehicle in question to that of the HS20 operating rating. To continue the practice of having information available to easily judge permit applications, FDOT's rating process includes an FL120 permit load rating as part of the routine rating of bridges. Single-trip permit vehicles will be evaluated outside of the routine FDOT rating process.

Since *LRFR (Part B)* does not specifically address pre-stressed concrete segmental box girders, perform all rating analysis for this bridge type, using *LRFR (Part A)* procedures. For this bridge type, a minimum acceptable rating factor of 1.0 is required for all legal loads and the FL120 Permit load (Strength and Service when applicable).

##### 6A.1.5.1—Design Load Rating

6 – Load Rating Analysis

August 2012

**6A.1.5.2 Legal Load Rating**

Replace with the following:

This second level rating provides a single safe load capacity (for a given truck configuration) applicable to AASHTO and State legal loads. Live load factors are selected based on the truck traffic conditions at the site. Using this check, bridges are screened for both the strength and service limit states as noted in Table 6.0-1.

**6A.2 Loads for Evaluation**

**6A.2.3.1 Vehicular Live Loads (Gravity Loads): LL**

Replace the live load models with the following models:

Design Load: HL-93 Design Load per LRFD Design Specifications

Legal Loads: Florida Legal Loads (SU4, C5, and ST5, see 6A.4.4.2.1 for vehicle configurations).

Florida Legal Loads (SU2, SU3, C3, and C4, see 6A.4.4.2.1 for vehicle configurations).

Permit Load: Florida Permit Load (FL120, see 6A.4.5.4.2.1 for vehicle configurations). For new bridges the minimum rating factor for the FL120 is 1.0.


**6A.3 Structural Analysis**

Add the following:

Transverse and longitudinal ratings shall be reported for post-tensioned concrete segmental bridges. All bridge decks designed with transverse prestressing require transverse ratings. For all other bridges, only longitudinal ratings are typically required.

**C6A.2.3.1**

For simple span bridges, see figure C6-4 for a comparison of legal loads and HL-93.

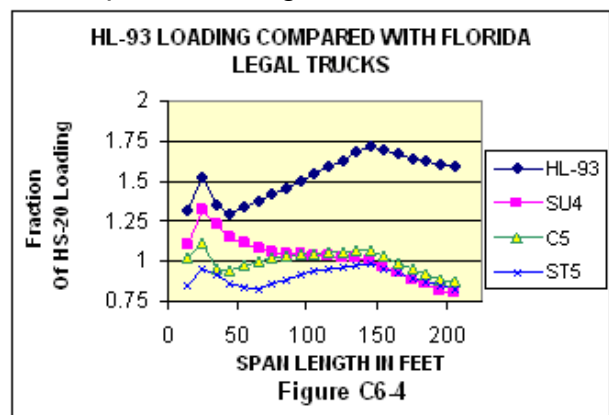

### **6A.3.1 General**

Add the following:

The level of analysis chosen is a tradeoff between sophistication of analysis and required work effort. The simpler methods are chosen as a first choice due to the need to analyze many structures with limited resources. When this analysis yields satisfactory results, there is no need to perform a more sophisticated analysis. Satisfactory results would be the establishment of a safe load carrying capacity that does not require posting the structures and does not unduly restrict the flow of permitted overweight trucks. A more sophisticated analysis is justified to avoid posting the bridge or to ease restrictions on the flow of permitted overweight trucks.

### **6A.3.2 Approximate Methods of Structural Analysis**

Approximate methods include one-dimensional line-girder analysis using LRFD distribution factors.

For bridge superstructures meeting the requirements of LRFD 4.6.2.2, use the approximate live load distribution factors in the initial load rating.

Inverted-T beam bridges meeting the requirements of SDG 2.9C may use the live load distribution factors specified in that article.

For bridges constructed with composite pre-stressed deck panels, the live load distribution factors will be increased by a factor of 1.1 thus increasing the load and reducing the capacity.

### 6A.3.3 Refined Methods of Analysis

Refined methods of analysis include two or three dimensional models using grid or finite-element analysis.

All analyses will be performed assuming no benefit from the stiffening effects of any traffic railing barrier or other appurtenances.

Refined methods of analysis may utilize actual material properties as determined from field sampling and tests of the materials.

When a refined method of analysis is used, indicate the name, version, and date of the software used on the FDOT Load Rating Summary Tables.

Refined methods may be performed before attempting load tests (for load testing, see Section 8).

## 6A.4 Load Rating Procedures

### 6A.4.2 General Load Rating Equation

Add the following:

When calculating the Service Limit State capacity for pre-stressed concrete flat slabs and girders with bonded tendons/strands use transformed section properties when calculating stresses before losses (at transfer) and after losses (including loss of pre-stress.)

### C6A.3.3

A two or three dimensional model looks at the structure globally and treats a girder-slab structure as a system using finite element methods. The SALOD program approximates this by comparing the structure to stored finite element solutions. When analysis is performed, certain minimum material properties are assumed based on design criteria or assumed material properties based on year of construction. Actual material properties may be significantly better due to suppliers exceeding minimum standards, concrete increasing in strength with age, or structures material properties being higher grade than assumed. Therefore, testing material may result in higher material property values thus increasing the rating of the structure. Conversely, the opposite of the above statement is true for deteriorated conditions

### C6A.4.2

Add the following:

For a detailed explanation of stress calculations in pre-stressed concrete girders, see NCHRP 496. The correct use of transformed section properties for calculation of pre-stress losses is essential for the precise calculation of stresses at Service Limit State.

**6A.4.2.2 Limit States**

Replace Table 6A.4.2.2-1 with FDOT Table 6A.4.2.2-1.

FDOT Table 6A.4.2.2-1 Limit States and Load Factors for Load Rating

Bridge Type	Direction	Limit State	Load Factors									
			Permanent Load			Transient Load			Design Load		Legal Load	FL120 Permit
			DC	DW	EL	FR	TU CR SH	TG	Inventory	Operating		
Steel	Longitudinal	Strength I	1.25	1.50	n/a	n/a	n/a	n/a	1.75	1.35	1.35	n/a
		Strength II	1.25	1.50	n/a	n/a	n/a	n/a	n/a	n/a	n/a	1.35
		Service II <sup>2</sup>	1.00	1.00	n/a	n/a	n/a	n/a	1.30	1.00	1.30	0.90
Reinforced Concrete	Longitudinal	Strength I	1.25	1.50	n/a	n/a	n/a	n/a	1.75	1.35	1.35	n/a
		Strength II	1.25	1.50	n/a	n/a	n/a	n/a	n/a	n/a	n/a	1.35
Pre-stressed Concrete (Flat Slab and Deck / Girder)	Longitudinal	Strength I	1.25	1.50	n/a	n/a	n/a	n/a	1.75	1.35	1.35	n/a
		Strength II	1.25	1.50	n/a	n/a	n/a	n/a	n/a	n/a	n/a	1.35
		Service I	1.00	1.00	n/a	n/a	n/a	n/a	n/a	n/a	n/a	1.00
		Service III <sup>3</sup>	1.00	1.00	n/a	n/a	n/a	n/a	0.80	0.80	0.80	n/a
Wood	Longitudinal	Strength I	1.25	1.50	n/a	n/a	n/a	n/a	1.75	1.35	1.35	n/a
		Strength II	1.25	1.50	n/a	n/a	n/a	n/a	n/a	n/a	n/a	1.35
Post Tensioned Concrete	Longitudinal	Strength I	1.25	1.50	1.00	1.00	0.50	n/a	1.75	1.35	1.35	n/a
		Strength II	1.25	1.50	1.00	1.00	0.50	n/a	n/a	n/a	n/a	1.35 <sup>5</sup>
		Service III <sup>3</sup>	1.00	1.00	1.00	1.00	1.00	0.50	0.80	0.80 or 1.0 SL <sup>4</sup>	0.80 or 1.0 SL <sup>4</sup>	0.70 or 0.90 SL <sup>4</sup>
	Transverse	Strength I	1.25	1.50	1.00	n/a	n/a	n/a	1.75	1.35	n/a	n/a
		Strength II	1.25	1.50	1.00	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		Service I	1.00	1.00	1.00	n/a	n/a	n/a	1.00	1.00	n/a	n/a

Notes:

1. TU and TG are considered for Service I and Service III Design Inventory only.
2. The Service II limit state need only be checked for compact steel girders. For all other steel girders, the Strength limit states will govern.
3. For Service III tensile stress limits, see FDOT Table 6A.5.4.1-1.
4. For I-girders use a load factor of 0.8 (inventory, operating, legal) or 0.7 (permit); for segmental box girders use 0.8 (inventory) or 1.0 and striped lanes (SL) (operating and legal) or 0.9 and striped lanes (SL) (permit).
5. For I-girders use a load factor of 1.35; for segmental box girders use 1.35 and striped lanes (SL).

**6A.4.2.3 Condition Factor**

Add the following after Table 6A.4.2.3-1:

The department prefers load ratings be performed taking account of field measured deterioration. However, in the absence of measurements, global condition factors shall be used.

**6A.4.2.4 System Factor**

Replace Table 6A.4.2.4-1 with FDOT Tables 6A.4.2.4-1, 2 and 3.

The system factors of FDOT tables 6A.4.2.4-1, 2 and 3 shall apply for flexural and axial effects at the Strength Limit States. Higher values than those tabulated may be considered on a case-by-case basis with the approval of the department. System factors need not be less than 0.85. In no case shall the system factor exceed 1.3.

**FDOT Table 6A.4.2.4-1 General System Factors ( $\phi_s$ )**

<b>Superstructure Type</b>	<b>System Factors (<math>\phi_s</math>)</b>
Rolled/Welded Members in Two-Girder/Truss/Arch Bridges <sup>1</sup>	0.85
Riveted Members In Two-Girder/Truss/Arch Bridges <sup>1</sup>	0.90
Multiple Eye Bar Members in Truss Bridges	0.90
Floor beams with Spacing > 12 feet and Non-Continuous Stringers and Deck	0.85
Floor beams with Spacing >12 feet and Non-Continuous Stringers but with continuous Decks	0.90
Redundant Stinger subsystems between Floor beams	1.00
All beams in non-spliced concrete girder bridges	1.00
Steel Straddle Bents	0.85

Note:

Pertains to type of build-up or rolled members not type of connection

FDOT Table 6A.4.2.4-2 System Factors ( $\phi_s$ ) for Post-Tensioned Concrete Beams

Number of Girders in Cross Section	Span Type	Number of Hinges Required for Mechanism	System Factors ( $\phi_s$ )			
			Number of Tendons per Web			
			1	2	3	4
2	Interior	3	0.85	0.90	0.95	1.00
	End	2	0.85	0.85	0.90	0.95
	Simple	1	0.85	0.85	0.85	0.90
3 or 4	Interior	3	1.00	1.05	1.10	1.15
	End	2	0.95	1.00	1.05	1.10
	Simple	1	0.90	0.95	1.00	1.05
5 or more	Interior	3	1.05	1.10	1.15	1.20
	End	2	1.00	1.05	1.10	1.15
	Simple	1	0.95	1.00	1.05	1.10

Note: The tabulated values above may be increased by 0.05 for spans containing more than three intermediate, evenly spaced, diaphragms in addition to the diaphragms at the end of each span.

FDOT Table 6A.4.2.4-3 System Factors ( $\phi_s$ ) for Steel Girder Bridges

Number of Girders in Cross Section	Span Type	# of Hinges Required for Mechanism	With Diaphragms <sup>1</sup>	Without Diaphragms
2	Interior	3	1.00	0.85
	End	2	1.00	0.85
	Simple	1	1.00	0.85
3 or 4	Interior	3	1.00	1.00
	End	2	1.00	0.95
	Simple	1	1.00	0.90
5 or more	Interior	3	1.00	1.00
	End	2	1.00	1.00
	Simple	1	1.00	0.95

Notes:

With at least three evenly spaced intermediate diaphragms (excluding end diaphragms) in each span.

The above tabulated values may be increased by 0.05 for riveted members.

#### **6A.4.4 Legal Load Ratings**

##### **6A.4.4.1 Purpose**

Bridges that do not have sufficient capacity under the design-load rating operating level (i.e. RF 1.4 or less) shall be load rated for the SU4, C5, and ST5 legal loads to establish the potential need for load posting or strengthening.

If the SU4 or C5 or ST5 Legal Load ratings are less than one, ratings at operating level may be required for SU2, SU3, C3 and C4.

Load rating for legal loads determines the safe load capacity of a bridge for the AASHTO family of legal loads and State

legal loads, using safety and serviceability criteria considered appropriate for evaluation. A single safe load capacity is obtained for a given legal load configuration.

##### **6A.4.4.2.1 Live Loads**

Replace this article with the following:

For all span lengths, the critical load effects shall be created by:

For all load effects, Florida legal loads defined in Figures 6A.4.4.2.1-1 and 6A.4.4.2.1-2 Assume the same legal trucks are in each loaded lane; do not mix trucks.

For negative moments and reactions at interior supports, a lane load of 0.2 klf combined with two of the same legal trucks, applied separately, multiplied by 0.75 heading in the same direction separated by 30 ft.



In addition, for span lengths greater than 200 ft., critical load effects shall be created by:

The same Florida legal loads, applied separately, multiplied by 0.75 and combined with a lane load of 0.2 klf.





Dynamic load allowance shall be applied to the legal vehicles and not the lane loads.



**FDOT Figure 6A.4.4.2.1-1 Florida Legal Trucks**

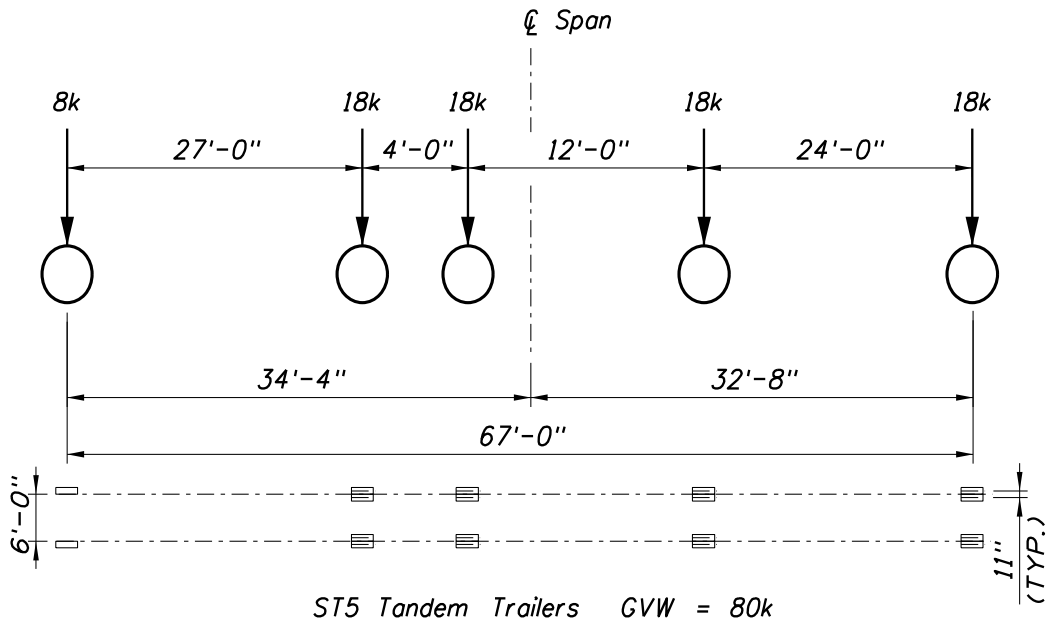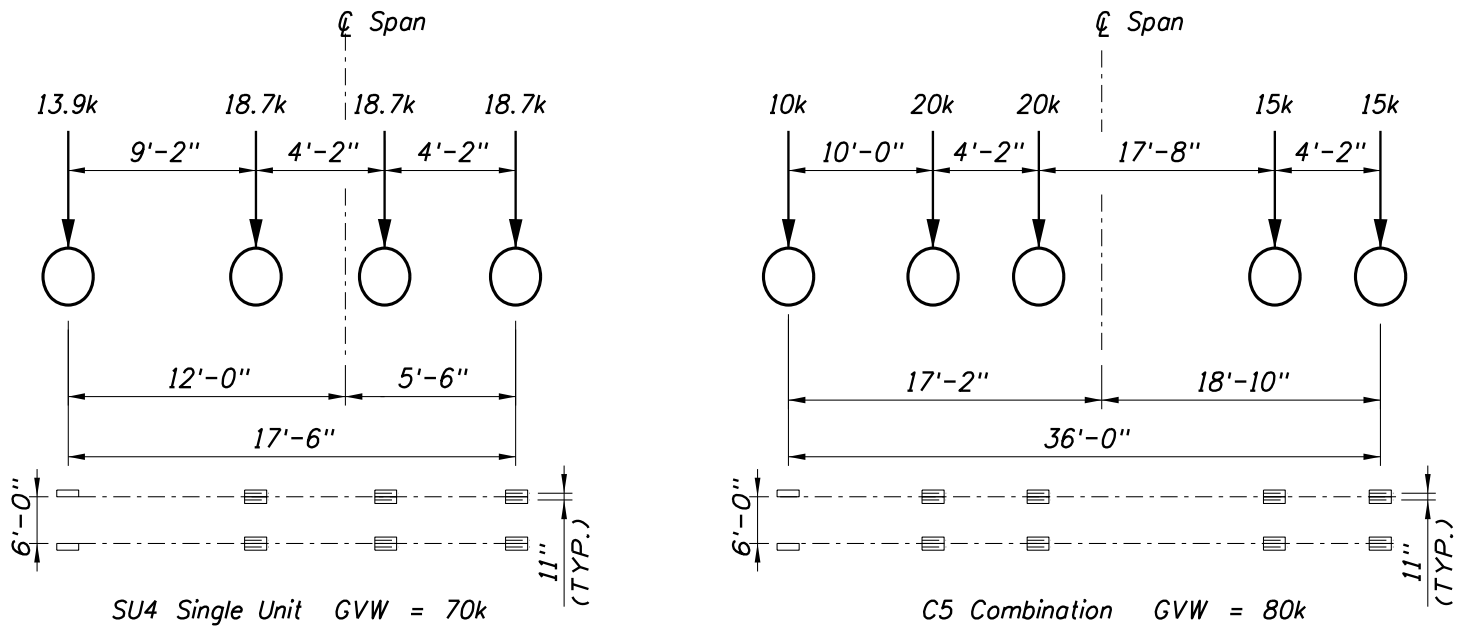

**FDOT Figure 6A.4.4.2.1-2 Additional Florida Legal Trucks**

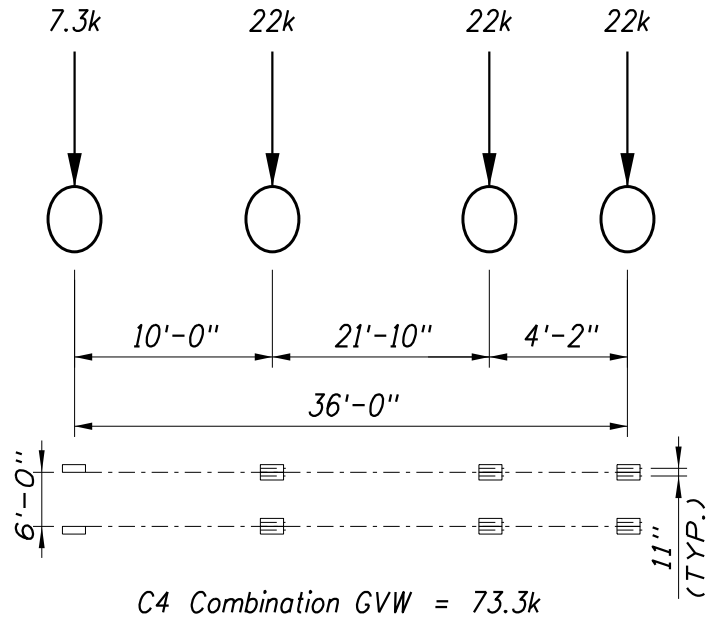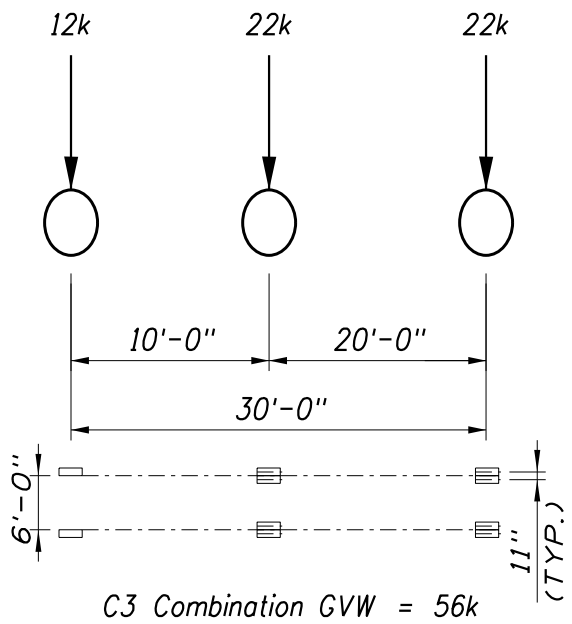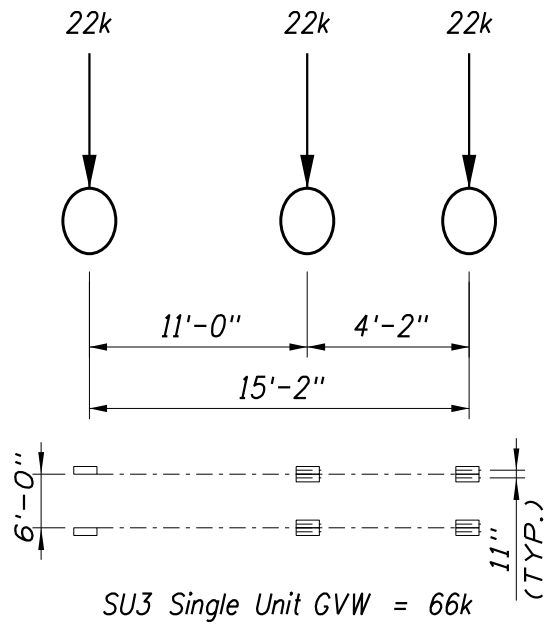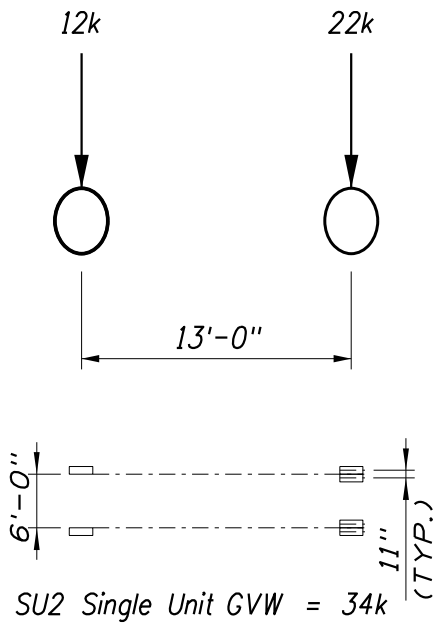

**6A.4.4.2.3 Generalized Live Load Factors:  $\gamma_L$** 

Revise Table 6A.4.4.2.3a-1 as follows:

For all Traffic Volumes, revise all Load Factors to 1.35.

**C6A.4.4.2.3**

Add the following:

The LRFD HL-93 live-load model envelopes FDOT legal loads. As such, if the live load factor of 1.35 for the design-load operating rating yields a reliability index consistent with traditional operating ratings, this live load factor can be used for legal-load rating of the FDOT legal loads.

Live load factors for FDOT legal loads are not specified as a function of ADTT.

**6A.4.5 Permit Load Ratings****6A.4.5.1 Background**

Calculate the capacity for permit trucks using one lane distribution factor for single trip permits and two or more lanes distribution factor for routine annual permits as shown in Table 6A.4.5.4.2a-1. The two or more lanes distribution factor assumes the permit vehicle is present in all loaded lanes and *LRFD* live load distribution equations are used. Do not use *LRFD* formula 4.6.2.2.4-1 since mixed traffic calculations are not performed.

**C6A.4.5.1**

Florida has chosen to apply a Service Limit State rating for permitting overload vehicles using load factors that include a reduced reliability factor. The live load factor is applied to a capacity calculated with the rating vehicle placed in all lanes. The load factor was developed to simulate a rating vehicle in the rating lane with adjoining lanes filled with legal vehicles (tractor trailers). The combined effect of these loads is multiplied by the multiple presence factor of 0.9 (Ontario Bridge Code).

**6A.4.5.2 Purpose**

Bridges designed after January 1, 2005 are required to have rating factors for the FL120 permit truck. Rate the FL120 for both Strength and Service Limit State when applicable.

**6A.4.5.4.2 Load Factors****C6A.4.5.4.2**

Add the following:

Since routine permits are evaluated using the FL120 permit truck and values of ADTT are not well known, a single load factor is specified for routine permit load rating. Similarly, a single load factor is specified for single-trip permits.


**6A.4.5.4.2a Routine (Annual) Permits**

Replace the Article with the following:

The FL120 permit truck shall be considered as the routine annual permit vehicle to be used to verify overload capacity of Florida bridges. The FL120 shall be checked at Strength Limit State and Service Limit State as noted in FDOT Table 6A.4.2.2-1 and the minimum rating factor for new bridges is 1.0.

For spans over 200 feet assume the FL120 permit truck with coincident 0.20 kips per foot lane load. Assume the permit trucks are in each lane; do not mix trucks.

The FL120 permit truck configuration is shown in the figure below:

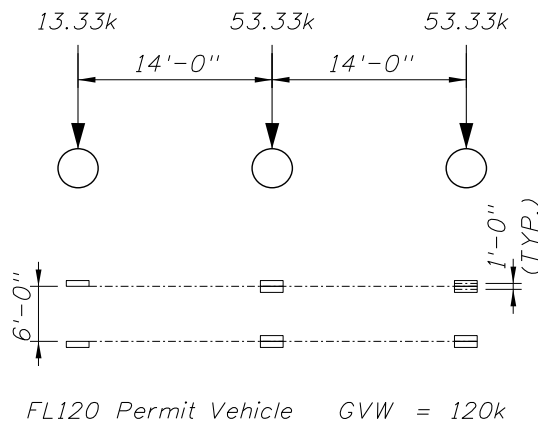

**C6A.4.5.4.2a**

The FL120 permit truck is conceived to be a benchmark to past load factor design (LFD) practice in which the HS-20 truck was rated at the operating level with a load factor of 1.3. A LRF method for the FL120 permit truck equal to 1.0 is equivalent to an LFD operating rating for the HS-20 truck equal to 1.67. The axle spacing of the FL120 is not changed to emulate a truck crane.

It is reasonable to use the multiple-lane distribution factor for the permit load rating since the force effects of the permit trucks are similar to the HL-93 notional load have been shown to be very similar. Thus, this application is close to the intent of the AASHTO LRF methodology where the HL-93 is placed in remote lanes. The FL120 is intended to replicate the traditional HS20 operating rating where all lanes were occupied by the same truck. Thus, the use of multiple-lane distribution factors is equally appropriate for the FL120 permit load rating.

**6A.5 Concrete Structures**

**6A.5.2 Material**

Add the following:

For concrete made with Florida aggregate calculate the modulus of elasticity by applying a 0.9 factor times the value found in the specifications.

See SDG 1.4.1 for the appropriate value for the modulus of rupture.

**6A.5.4 Limit States**

**6A.5.4.1 Design-Load Rating**

The stress limits given in FDOT Table 6A.5.4.1-1 shall be satisfied by all pre-stressed concrete bridges.

Pre-stressed deck/girder bridges with a continuous deck but without continuous girders shall be load rated as simple spans.

<b>FDOT Table 6A.5.4.1-1 Stress Limits for Pre-stressed Concrete Bridges</b>		
Condition	Design Inventory	Design Operating, Legal and Permit
<b>Compressive Stress - All Bridges (Longitudinal or Transverse)</b>		
Compressive stress under effective pre-stress, permanent loads, and transient loads (Allowable compressive stress shall be reduced according to <i>LRFD</i> 5.9.4.2.1 when slenderness of flange or web is greater than 15)	0.60f <sub>c</sub>	0.60f <sub>c</sub>
<b>Longitudinal Tensile Stress in Pre-compressed Tensile Zone – Non-segmental Bridges (including Post-Tensioned I-Girders)</b>		
For components with bonded pre-stressing tendons or reinforcement that are subject to not worse than:		
(a) an extremely aggressive corrosion environment.	3√f <sub>c</sub> psi	7.5√f <sub>c</sub> psi
(b) slightly or moderately aggressive corrosion environments.	6√f <sub>c</sub> psi	7.5√f <sub>c</sub> psi
<b>Longitudinal Tensile Stress in Pre-compressed Tensile Zone - Segmental Box Girder Bridges</b>		
For components with bonded pre-stressing tendons or reinforcement that are subject to not worse than:		
(a) an extremely aggressive corrosion environment.	3√f <sub>c</sub> psi	3√f <sub>c</sub> psi
(b) slightly or moderately aggressive corrosion environments.	6√f <sub>c</sub> psi	6√f <sub>c</sub> psi
For components with un-bonded pre-stressing tendons	No Tension	No Tension
For components with Type B joints (dry joints, no epoxy)	100 psi comp	No Tension
<b>Tensile Stress in Other Areas - Segmental Box Girder Bridges</b>		
Areas without bonded reinforcement	No tension	No tension
Areas with bonded reinforcement sufficient to carry the tensile force in the concrete calculated on the assumption of an un-cracked section is provided at a stress of 0.5f <sub>y</sub> (<30 ksi)	6√f <sub>c</sub> psi tension	6√f <sub>c</sub> psi tension
<b>Transverse Tension, Bonded Post-tensioned Deck Slabs</b>		
Tension in the transverse direction in the pre-compressed tensile zone calculated on the basis of an un-cracked section (i.e. top pre-stressed slab) for:		
(a) an extremely aggressive corrosion environment	3√f <sub>c</sub> psi	6√f <sub>c</sub> psi
(b) slightly or moderately aggressive corrosion environments	6√f <sub>c</sub> psi	6√f <sub>c</sub> psi
<b>Principal Tensile Stress at Neutral Axis in Webs - Segmental Box Girder Bridges</b>		
All types of segmental construction with internal and/or external tendons.	3.5√f <sub>c</sub> psi tension	3.5√f <sub>c</sub> psi tension

**6A.5.4.2 Legal Load Rating and Permit Load Rating**

**6A.5.4.2.2a Legal Load Rating**

Legal load rating of pre-stressed concrete bridges is based on satisfying Strength and Service Limit States (see FDOT Table 6A.4.2.2-1)

**6A.5.4.2.2b Permit Load Rating**

Permit load rating of pre-stressed concrete bridges is based on satisfying Strength and Service Limit States (see FDOT Table 6A.4.2.2-1).

**C6A.5.4.2.2b**

Florida has elected to use a Service Limit State for permit analysis and has removed the check for stress in the reinforcing at the Strength Limit State.

**6A.5.6 Minimum Reinforcement**


See *SDG* 4.1.5 for clarification of the appropriate application of minimum reinforcing at the ends of simply supported bridge girders.

**6A.5.8 Evaluation for Shear**

For shear load rating, use any of the methods allowed in *LRFD*. If the maximum rating factor is still less than 1, use the General Procedure of *LRFD* 5.8.3.4.2 with area of stirrup reinforcement intersecting the plane created by the theta ( $\theta$ ) angle starting at the design section under review and projecting toward the support. This plane will not project past the intersection of center-line of the bearing and the centroid of the pre-stressing steel on the tension side of the member.

**C6A.5.8**

The concept of using the area of steel starting at the design section under review and projecting toward the support is shown below:

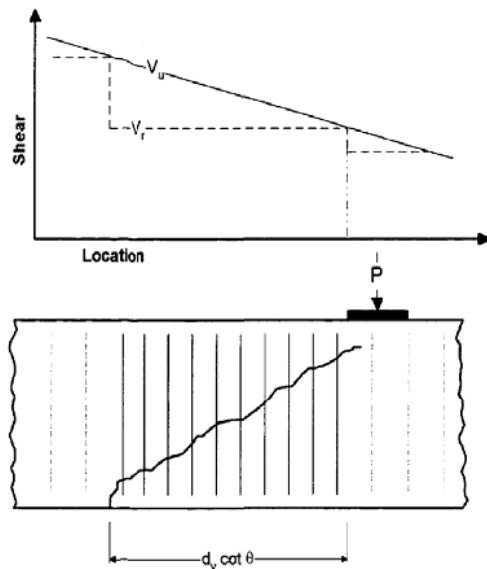

**6A.5.10 Temperature, Creep and Shrinkage Effects**

At the Service Limit State, all pre-stressed concrete bridges shall include the effect of uniform temperature (TU), when appropriate, creep (CR), and shrinkage (SH). In addition, temperature gradient (TG) shall be included for post-tensioned beam and box girder structures. See FDOT Table 6A.4.2.2-1 for clarification.

**6A.5.11 Rating of Segmental Concrete Bridges**

**6A.5.11.2 General Rating Requirements**

Six features of concrete segmental bridges are to be load rated at the Design Load (Inventory and Operating) Levels. Three of these criteria are at the Service Limit State and three at the Strength Limit State, as follows:

- At the Service Limit State:
- Longitudinal Box Girder Flexure
- Transverse Top Slab Flexure
- Principle Web Tension
- At the Strength Limit State:
- Longitudinal Box Girder Flexure
- Transverse Top Slab Flexure
- Web Shear

**C6A.5.13.2**

For general references, see *New Directions for Florida Post-Tensioning Bridges, Vol. 10 A “Load Rating Post-Tensioned Concrete Segmental Bridges”*. *Volume 10A* can be found on the Structures Design web site at the following address:

[www.dot.state.fl.us/structures/posttensioning.htm](http://www.dot.state.fl.us/structures/posttensioning.htm).

For detailed load rating requirements, see Appendix J6A.

In accordance with AASHTO *LRFR* Equation 6A.4.2.1.-1, the general Load Rating Factor, RF, shall be determined according to the formula:

$$RF = C - (\gamma_{DC})(DC) - (\gamma_{DW})(DW) \pm (\gamma_{EL})(P + EL) - (\gamma_{FR})(FR) - (\gamma_{CR})(TU + CR + SH) - (\gamma_{TG})(TG) / (\gamma_L)(LL + IM)$$

Where:

For Strength Limit States:

C = Capacity =  $(\phi_c \times \phi_s \times \phi) R_n$ .

$\phi_c$  = Condition Factor per Article 6A.4.2.3.

$\phi_s$  = System Factor per Article 6A.4.2.4

$\phi$  = Strength Reduction Factor per *LRFD*.

$R_n$  = Nominal member resistance as inspected, measured and calculated according to formulae in *LRFD*.

For Service Limit States:

C =  $f_R$  = Allowable stress at the Service Limit State (FDOT Table 6A.5.4.1-1).

**6A.6 Steel Structures**

**6A.6.4 Limit States**

**6A.6.4.1 Design-Load Rating**

Bridges shall not be rated for fatigue. If the fatigue crack growth is anticipated, Section 7 of the *MBE* can be used to estimate the remaining fatigue life.

The stress limits given in FDOT Table 6A.6.4.1-1 shall be satisfied by all prestressed decks on steel bridges.

**C6A.6.4.1**

The estimate of the remaining fatigue life of Section 7 of the *MBE* requires a historical record of past truck traffic in terms of average daily truck traffic (ADTT) and projected future traffic. Many times, conservative recreation and projection of traffic volumes produces a worst case scenario which results in low remaining fatigue lives or totally exhausted fatigue lives. As fatigue life estimates are based upon statistical evaluation of laboratory tests, different levels of confidence are presented in Section 7. The minimum expected fatigue life, the evaluation fatigue life and the mean fatigue life are based upon approximately 98%, 85% and 50% probabilities of cracking, respectively. Judgment must be used in evaluating the results of the fatigue-life estimates.

FDOT Table 6A.6.4.1-1 Stress Limits for Pre-stressed Concrete Decks on Steel Bridges		
Condition	Design Inventory	Design Operating, Legal and Permit
Transverse Tension, Bonded Post-tensioned Deck Slabs:		
Tension in the transverse direction in the pre-compressed tensile zone calculated on the basis of an un-cracked section (i.e. top pre-stressed slab) for:		
(a) an extremely aggressive corrosion environment	$3\sqrt{f'_c}$ psi	$6\sqrt{f'_c}$ psi
(b) slightly or moderately aggressive corrosion environments	$6\sqrt{f'_c}$ psi	$6\sqrt{f'_c}$ psi



**6A.6.13 Fracture-Critical Members (FCMs)**

As with all other steel members, the appropriate system factors of FDOT Tables 6A.4.2.4-1 or 6A.4.2.4-3 shall be applied in the ratings of FCMs.

Steel members which are traditionally classified as FCMs may be declassified through analysis if the material satisfies the FCM fracture-toughness of LRFD Table 6.6.2-2. After the approval of an exception based upon an approved refined analysis demonstrating that the bridge with the fractured member can continue to carry a significant portion of the design load, the member may be declassified and treated as a redundant member. See LRFD Article C6A.6.2. After declassification, the member may be rated using a system factor of 1.0.

**6A.6.14 Double-Leaf Bascule with Span Locks**

Evaluate all appropriate load combinations at Strength II Limit State. See Section 6A.1.8.8 for additional criteria.

**C6A.6.13**

Only FCMs which are fabricated from material meeting the FCM fracture-toughness requirements are candidates for declassification. Newer bridges designed, fabricated and constructed since the concept of FCMs was introduced should meet this material requirement. The demonstration of non-fracture criticality must include an analysis of the damaged bridge with the member in question fractured and a corresponding dynamic load representing the energy release of the fracture. Acceptable remaining load carrying capacity may be considered equal to the full factored load of the Strength I load combination associated with the number of striped lanes.

**Appendix A6A - Load and Resistance Factors Rating Flow Chart**

*Replace the flowchart with FDOT flowcharts in Section 2.2.*

**Appendix B6A - Limit States and Load Factors for Load Rating**

*Delete all four tables and use FDOT Table 6A.4.2.2-1 .*

**Appendix D6A - AASHTO Legal Loads**

*Delete section a) and use the Florida legal trucks defined in article 6A.4.4.2.1.*

**Appendix J6A - Rating of Segmental Concrete Box Girder Bridges Step-By-Step Supplement****J6A.1 - Load Factors and Load Combinations**

Load factors and load combinations for the Strength and Service Limit States shall be made in accordance with FDOT Table 6A.4.2.2-1. Load factors for permanent (e.g. dead) loads and transient (e.g. temperature) loads are provided. Note: one-half thermal gradient (0.5TG) is used only for longitudinal Service Inventory conditions.

STRENGTH I and II and SERVICE I and III limit states are used in the context of their definitions as given in FDOT Table 6A.4.2.2-1 summarizing:

STRENGTH I - applies to Design Load Rating (Inventory and Operating) and Legal Load Rating.

STRENGTH II - applies only to Permit Loads.

SERVICE I - applies primarily for concrete in compression but is also to prevent yield of tension face reinforcement or prestress under overloads (permits). This limit state is extended to concrete tension in transversely prestressed deck slabs, typical of most segmental bridges.

SERVICE III - applies to concrete in longitudinal tension and principal tension. Load factors for SERVICE III for Design Operating, Legal, and Permit ratings have been selected in conjunction with either higher allowable tensile stress or use of the number of striped lanes.

The following is a detailed checklist of the load applications, combinations and circumstances necessary to satisfy FDOT and AASHTO *LRFR* ratings.

**J6A.2 - Design Load Rating – Inventory**

## Transverse:

- Apply HL93 Truck or Tandem (FDOT Table 6A.4.2.2-1).
- Do not apply uniform lane load.
- Apply same axle loads in each lane if multiple lane loading applies.
- Apply Dynamic Load Allowance, IM = 1.33 on Truck or Tandem.
- For both Strength and Service Limit States, use number of load lanes per *LRFD*.
- Apply multi-presence factor: one lane,  $m = 1.20$ ; two lanes,  $m = 1.00$ ; three,  $m = 0.85$ ; four or more,  $m = 0.65$ . (Maximum value of  $m = 1.20$  is the appropriate AASHTO *LRFD* / *LRFR* current criteria to allow for rogue vehicles).
- Place loads in full available width as necessary to create maximum effects.
- Apply pedestrian live load as necessary (counts as one lane for “m”).
- Apply no Thermal Gradient transversely.
- Use SERVICE I Limit State with live load factor,  $\gamma_L = 1.00$  and limit concrete transverse flexural stresses to values in FDOT Table 6A.5.4.1-1 . (Note: = 1.00 as AASHTO *LRFR*).
- For STRENGTH I Limit State use live load factor,  $\gamma_L = 1.75$ .

## Longitudinal:

- Apply HL93 Truck or Tandem, including 0.64 kip/ft uniform lane load (FDOT Table 6A.4.2.2-1).
- Apply same load in each lane.
- Apply Dynamic Load Allowance, IM = 1.33 on Truck or Tandem only.
- For both Strength and Service Limit States, use number of load lanes per *LRFD*.
- Apply multi-presence factor: one lane,  $m = 1.2$ ; two lanes,  $m = 1.00$ ; three,  $m = 0.85$ ; four or more,  $m = 0.65$ . (Maximum value of  $m = 1.20$  is the appropriate AASHTO *LRFD* / *LRFR* current criteria for notional loads and rogue vehicles).
- For negative moment regions: apply 90% of the effect of two Design Trucks of 72 kip GVW placed in adjacent spans and spaced a minimum of 50 feet apart between the leading axle of one and the trailing axle of the other, plus 90% of uniform lane load.
- Place loads in full available width as necessary to create maximum effects.
- Apply pedestrian live load as necessary (counts as one lane for “m”).
- For Thermal Gradient, apply 0.50TG with live load for Service but zero TG for Strength.
- Use SERVICE III Limit State, use live load factor  $\gamma_L = 0.8$ , and limit longitudinal tensile stress to values in FDOT Table 6A.5.4.1-1.
- For STRENGTH I Limit State use live load factor,  $\gamma_L = 1.75$ .

**J6A.3 - Design Load Rating – Operating**

## Transverse:

- Apply one HL93 Truck or Tandem per lane (FDOT Table 6A.4.2.2-1).
- Do not apply uniform lane load.
- Apply same axle loads in each lane if multiple lane loading applies.
- Apply Dynamic Load Allowance,  $IM = 1.33$  on Truck or Tandem.
- For both Strength and Service Limit States, use number of load lanes per *LRFD*.
- Apply multi-presence factor: one and two lanes,  $m = 1.0$ ; three,  $m = 0.85$ ; four or more,  $m = 0.65$ . (Maximum limit of 1.0 applies because this is a rating for specific (defined) axle loads, not notional loads or rogue vehicles).
- Place loads in full available width as necessary to create maximum effects.
- Apply pedestrian live load as necessary (counts as one lane for “m”).
- Apply no Thermal Gradient transversely.
- Use SERVICE I Limit State with live load factor,  $\gamma_L = 1.00$  and limit concrete transverse flexural stresses to values in FDOT Table 6A.5.4.1-1.
- For STRENGTH I Limit State use live load factor,  $\gamma_L = 1.35$ .

## Longitudinal:

- Apply HL93 Truck or Tandem, including 0.64 kip/ft uniform lane load (FDOT Table 6A.4.2.2-1).
- Apply same load in each lane.
- Apply Dynamic Load Allowance,  $IM = 1.33$  on Truck or Tandem only.
- For the Strength Limit State, use number of load lanes per *LRFD*.
- For the Service Limit State use the number of striped lanes.
- Place loads in full available width as necessary to create maximum effects (for example, in shoulders).
- Multi-presence factor: HL93 Design Load (including uniform lane load) one lane,  $m = 1.20$ ; two lanes,  $m = 1.00$ ; three,  $m = 0.85$ ; four or more,  $m = 0.65$ . (The maximum value of 1.20 for one lane is necessary because the load is a notional load with a uniform lane load component).
- For negative moment regions, apply 90% of the effect of two Design Trucks of 72 kip GVW placed in adjacent spans and each spaced a minimum of 50 feet apart between the leading axle of one and the trailing axle of the other, plus 90% of 0.64 kip/LF uniform lane load.
- Apply pedestrian live load as necessary (counts as one lane for “m”).
- Apply no Thermal Gradient.
- Use SERVICE III Limit State, use live load factor  $\gamma_L = 1.0$ , striped lanes, and limit concrete longitudinal flexural tensile and principal tensile stresses to values in FDOT Table 6A.5.4.1-1.
- For STRENGTH I Limit State use live load factor,  $\gamma_L = 1.35$ .

#### J6A.4 - Legal Load Rating

Longitudinal:

- Apply FDOT Legal Load Trucks SU4, C5 and ST5 (FDOT Table 6A.4.2.2-1).
- Apply same truck load in each lane using only one truck per lane (i.e. do not mix Trucks).
- Apply no uniform lane load.
- Apply Dynamic Load Allowance,  $IM = 1.33$  on Legal.
- For the Strength Limit State, use number of load lanes per *LRFD*.
- For Service Limit States, use number of striped lanes.
- Place loads in full available width as necessary to create maximum effects (i.e., in shoulders).
- Use multi-presence factor: one and two lanes,  $m = 1.00$ ; three,  $m = 0.85$ ; four or more,  $m = 0.65$ .
- Apply no pedestrian live load (unless very specifically necessary for the site - in which case it counts as one lane for establishing “m”).
- Apply no Thermal Gradient.
- Use SERVICE III Limit State, use live load factor,  $\gamma_L = 1.0$ , striped lanes, and limit concrete longitudinal flexural tensile and principal tensile stresses to values in FDOT Table 6A.5.4.1-1.
- For STRENGTH I Limit State, use live load factor,  $\gamma_L = 1.35$ .
- Negative moments load ratings may be limited by AASHTO *LRFR* 6A.4.4.2.1. If the value of the Rating Factor for the AASHTO Limiting Critical Load is less than 1.00, then the basic rating factor for all FDOT Legal Loads shall be reduced by multiplying by this value. See Appendix D6A(c) for load model.

#### J6A.5 - Permit Load Rating

Longitudinal, annual “blanket” permits:

- Apply ONE Permit Vehicle (FL120) in all lanes (FDOT Table 6A.4.2.2-1).
- For spans over 200 feet, apply a uniform lane load of 0.20 kip / LF in the lane with the permit vehicle. This uniform lane load should be applied beyond the footprint of the vehicle to create the maximum effects. However, for convenience, it may be applied coincident with the vehicle.
- For the Strength Limit State, use number of load lanes per *LRFD*.
- For Service Limit States, use a reduced load factor or see FDOT Table 6A.4.2.2-1.
- Place loads in full available width as necessary to create maximum effects (for example, in shoulders).
- Use multi-presence factor: one and two lanes,  $m = 1.00$ ; three,  $m = 0.85$ ; four or more,  $m = 0.65$ .
- Dynamic Load Allowance,  $IM = 1.33$  on Permit Trucks.
- Apply no pedestrian live load (unless very specifically necessary for the site - in which case it counts as one lane for establishing “m”).
- Apply no Thermal Gradient.
- Use SERVICE III Limit State, use live load factor  $\gamma_L = 0.9$ , striped lanes, and limit concrete longitudinal flexural tensile and principal tensile stresses to values in FDOT Table 6A.5.4.1-1 as appropriate.
- For STRENGTH II Limit State, use live load factor,  $\gamma_L = 1.35$ .
- Reduced Dynamic Load Allowance ( $IM$ ) or live load factor ( $\gamma_L$ ) may be considered only to avoid restrictions.

### **J6A.6 - Capacity – Strength Limit State**

The capacity of a section in transverse and longitudinal flexure may be determined using any of the relevant formulae or methods in the *LRFD Specifications*, or *AASHTO Guide Specification for Segmental Bridges* dated 1999, including more rigorous analysis techniques involving strain compatibility. The latter should be used in particular where the capacity depends upon a combination of both internal (bonded) and external (un-bonded) tendons.

For load rating, the capacity should be determined based upon actual rather than specified or assumed material strengths and characteristics. Concrete strength should be found from records or verified by suitable tests. If no data is available, the specified design strength may be assumed and appropriately increased for maturity. All new designs will assume the plan specified concrete properties. Post construction will include updated concrete properties.

In particular, for shear or combined shear with torsion, the capacity at the Strength Limit State for segmental bridges should be calculated according to the *AASHTO Guide Specification for Segmental Bridges*. The “Modified Compression Field Theory” of *LRFD* may be used as an alternative, but only for structures with continuously bonded reinforcement (e.g. large boxes cast-in-place in cantilever or on false-work).

### **J6A.7 - Allowable Stress Limits – Service Limit State**

Allowable stresses for the Service Limit State are given in FDOT Table 6A.5.4.1-1. The intent is to ensure a minimum level of durability for FDOT bridges that avoids the development or propagation of cracks or the potential breach of corrosion protection afforded to post-tensioning tendons. Also, these are recommended for the purpose of designing new bridges.

### **J6A7.1 - Longitudinal Tension in Joints**

#### **Type “A” Joints with Minimum Bonded Reinforcement**

The Service level tensile stress is limited to  $3\sqrt{f_c}$  or  $6\sqrt{f_c}$  (psi) for cast-in-place joints with continuous longitudinal mild steel reinforcing for Design Inventory Rating. (Reference: *AASHTO Guide Specification for Segmental Bridges* and *LRFD Table 5.9.4.2.2-1*). Reduced reliability at Design Operating, Legal and Permit conditions is attained by using the number of striped lanes and by allowing an increase in tensile stress to  $7.5\sqrt{f_c}$  (psi) (FDOT Table 6A.5.4.1-1).

#### **Type “A” Epoxy Joints with Discontinuous Reinforcement**

The Service level tensile stress is limited to zero tension for epoxy joints for Design Inventory, Design Operating, Legal, and Permit ratings. (Reference: *AASHTO Guide Specification for Segmental Bridges* and *LRFD Table 5.9.4.2.2-1*). Reduced reliability is attained by using the number of striped lanes.

#### **Type “B” Dry Joints**

Early precast segmental bridges with external tendons and non-epoxy filled, Type-B (dry) joints were designed to zero longitudinal tensile stress. In 1989, a requirement for 200 psi residual compression was introduced with the first edition of the *AASHTO Guide Specification for Segmental Bridges*. This was subsequently revised in 1998 to 100 psi compression. Service Level Design Inventory Ratings shall be based on a residual compression of 100 psi for dry joints. For Design Operating, Legal, and Permit Ratings, the limit is zero tension. (Reference: *AASHTO Guide Specification for Segmental Bridges* and *LRFD Table 5.9.4.2.2-1*). Reduced reliability is attained by using the number of striped lanes.

### J6A.7.2 - Transverse Tensile Stress

For a transversely pre-stressed deck slab, the allowable flexural stresses for concrete tension are provided in FDOT Table 6A.5.4.1-1 : namely, for Inventory  $3\sqrt{f_c}$  or  $6\sqrt{f_c}$  (psi) and for Operating  $6\sqrt{f_c}$  (psi).

### J6A.7.3 - Principal Tensile Stress – Service Limit State

A check of the principal tensile stress has been introduced to verify the adequacy of webs for longitudinal shear at service. This is to be applied to both for the design of new bridges and Load Rating. The verification, made at the neutral axis, is the recommended minimum prescribed procedure, as follows:

Sections should be considered only at locations greater than “H/2” from the edge of the bearing surface or face of diaphragm, where classical beam theory applies: i.e. away from discontinuity regions. In general, verification at the elevation of the neutral axis may be made without regard to any local transverse flexural stress in the web itself given that in most large, well proportioned boxes the maximum web shear force and local web flexure are mutually exclusive load cases. This is a convenient simplification. However, should the neutral axis lie in a part of the web locally thickened by fillets, then the check should be made at the most critical elevation, taking into account any coexistent longitudinal flexural stress. Also, if the neutral axis (or critical elevation) lies within 1 duct diameter of the top or bottom of an internal, grouted duct, the web width for calculating stresses should be reduced by half the duct diameter.

Calculate principle tension without the effect of thermal gradient.

Classical beam theory and Mohr’s circle for stress should be used to determine shear and principal tensile stresses. At the Service Limit State, the shear stress and Principal Tensile Stress should be determined at the neutral axis (or critical elevation) under the long-term residual axial force, maximum shear and/or maximum shear force combined with shear from torsion in the highest loaded web, using the live load factor shown in FDOT Table 6A.4.2.2-1. The live load should then be increased in magnitude so the shear stress in the highest loaded web increases until the Principal Tensile Stress reaches its allowable maximum value ([FDOT Table 6A.5.4.1-1](#)).

The Service Limit State Rating Factor is the ratio between the live load shear stress required to induce the maximum Principal Tensile Stress to that induced by the live load factor shown in FDOT Table 6A.4.2.2-1.

### J6A.8 - Local Details

Local Details (i.e. diaphragms, anchorage zones, blisters, deviation saddles, etc.) in concrete segmental bridges are discussed in Chapter 4 of Volume 10A *Load Rating Post-tensioned Concrete Segmental Bridges*. If a detail shows signs of distress (cracks), a structural evaluation should be performed for the Strength Limit State. The influence of anchorage zones shall be checked for principal tension in accordance with *Structure Design Guidelines* Section 4.5.11, Principal Tensile Stresses.

## Part B – Allowable Stress Rating and Load Factor Rating

### 6B.1 General

Use the most current Edition of the AASHTO *Standard Specification for Highway Bridges* with the allowable stresses shown in FDOT Table 6A.5.4.1-1.

### **6B.1.1 Application of Standard Design Specifications**

Add the following before the existing text:

When using the AASHTO Standard Specifications for Highway Bridges, follow explicitly the guidance in the Specifications. All deviations from the Specifications require approval by the department.

## **6B.5 Nominal Capacity**

### **6B.5.3 Load Factor Method**

#### **6B.5.3.3 Pre-stressed Concrete**

See *SDG* 4.1.5 for clarification of the appropriate application of minimum reinforcing at the ends for simply supported bridge girders.

## **6B.6 Loadings**

### **6B.6.2.2 Truck Loads**

Each load factor rating will include the following:

- a) HS20 (lane or truck which governs the rating) at the operating and inventory level
- b) SU4, C5 and ST5 Legal trucks at the operating level (Florida legal vehicles) as defined in Figure 6A.4.4.2.1-1.
- c) If the SU4 or C5 or ST5 Legal Load ratings are less than 1.0; ratings at operating level may be required for SU2, SU3, C3 and C4 as defined in Figure 6A.4.4.2.1-2.



## 7 POSTING OF BRIDGES AND POSTING AVOIDANCE

### 7.1 General

The bridge owner shall post all bridges in the National Bridge Inventory (NBI) within 90 or 180 days of opening or a change in load rating for on-system or off-system bridges, respectively.

Before weight limit posting is recommended, posting avoidance strategies should be discussed and approved by the department and may require additional analysis.

### 7.2 Posting Avoidance

Posting avoidance is the application of engineering judgment to a load rating by modifying the specification defined procedures through use of variances and exceptions.

The following methods of posting avoidance are presented in an approximate hierarchy judged to return the greatest benefit for the least cost or effort for Florida bridges. This hierarchy is not absolute and may change depending on the particular bridge being load rated.

Load rating must be performed in accordance with this *Manual*. A specification based load rating for the entire bridge using a common specification either *LRFR (Part A)* or *LRFR (Part B)* is required. Posting avoidance techniques may be used as follows:

Posting avoidance techniques are to be used to avoid weight limit posting, when appropriate, to extend the useful life of a bridge until strengthening or replacement of the bridge is planned and executed.

Posting avoidance techniques are not to be used when load rating a new bridge or when performing widening or rehabilitation. Posting avoidance techniques require either a Variation or an Exception as defined in the *PPM*. For bridges where the owner is a local government, concurrence from the bridge owner is required before variations or exceptions are processed by the department.

### **7.2.1 Dynamic Load Allowance (IM) for Improved Surface Conditions (Variance)**

Using field observations and engineering judgment for spans greater than 40 feet, the Dynamic Load Allowance may be reduced if the following conditions exist:

Where the bridge approach and the bridge have a smooth transition and where there are minor surface imperfections or depressions, the Dynamic Load Allowance (IM) may be reduced to 20%.

Where there is a smooth riding surface on the bridge and where the transitions from the bridge approaches to the bridge deck across the expansion joints are smooth, the Dynamic Load Allowance (IM) may be reduced to 10%. (An example of this would be a deck slab finished by grinding and grooving to remove irregularities with no bumps or steps at expansion joints).

### **7.2.2 Approximate and Refined Methods of Analysis (Variance)**

When using an approximate method of structural analysis (code defined live load distribution *LRFD* 4.6.2), a rating factor as low as 0.95 can be rounded up to 1.0.

Refined methods of structural analyses, as discussed in Section 6A.3.3, may be performed in order to establish an enhanced live load distribution and improved load rating. For continuous post-tensioned concrete bridges, a more sophisticated analysis of this type does not eliminate the need for a time-dependent construction analysis to determine overall longitudinal effects from permanent loads (e.g. BD 2 analysis).

### **7.2.3 Shear Capacity by AASHTO LRFD for Segmental Box Girder Bridges (Variance)**

When calculated in accordance with the *AASHTO LRFD* 5.8.6, the shear capacity, at the Strength Limit State, is based upon an assumed crack angle of 45 degrees, and may lead to an unsatisfactory load rating. The assumed angle of crack may be reconsidered and the capacity recalculated according to the procedure in Appendix B of "*Volume 10A Load Rating Post-Tensioned Concrete Segmental Bridges*" (Dated Oct. 8, 2004).

### **7.2.4 Existing Bridge Inventory Before January 2005 (Variance)**

If the bridge load carrying capacity as determined by Service III Limit State is causing unusual hardship and the current bridge inspection is showing no signs of either shear or flexural cracking, the capacity established for load posting and overweight vehicle permitting can be established using Strength Limit State.

### **7.2.5 Principal Tension – Segmental Concrete Bridges (Box Girders) (Variance)**

To calculate a crack angle more exactly than the assumed 45 degree angle use the specifications, found in Appendix B of "*Volume 10 A Load Rating Post-Tensioned Concrete Segmental Bridges*" (dated Oct. 8, 2004) found on the Structures Design Office internet web site.

### 7.2.6 Stiffness of Traffic Barrier (Exception)

Barrier stiffness should be considered and appropriately included if necessary. Inclusion of the barriers acting compositely with the deck slab and beams should improve longitudinal load ratings.

When barriers are considered in this manner, the difference in the modulus of elasticity of the lower strength barrier concrete relative to that of the deck slab and to that of the beams should be taken into account. The presence of joints in a barrier reduces the overall effective section at the joint to that of the deck slab plus beam. This may result in a local concentration of longitudinal stress that should be appropriately considered. Nevertheless, load ratings should benefit from reasonable consideration of barrier stiffness.

### 7.2.7 Segmental Concrete Box Girder – Longitudinal Tension in Epoxy Joints (Exception)

The *AASHTO Guide Specification for Segmental Bridges* and *LRFD* limit longitudinal tensile stresses to zero at epoxy match-cast joints under Service level conditions. The ability of the epoxy joint to accept tension is not considered. However, in properly prepared epoxy joints the bond usually exceeds the tensile strength of the concrete. Consequently, for posting avoidance, tensile stresses may be accepted as a function of the location and quality of the epoxy joint:

- For top fiber stresses on the roadway surface – no tension is permitted for all load rating calculations.
- For bottom fiber stresses –
  - a) Allow 200 psi tension at good quality epoxy joints (i.e. no leaks and fully sealed).
  - b) No tension allowed for poor quality epoxy joints (i.e. leaky or not filled, gaps).

### **7.2.9 Concrete Box Girder – Principal Tensile Stress (Exception)**

If the load rating based upon the limiting principal tensile stress at the neutral axis of the basic beam or composite section is not satisfactory, the rating factor with regard to principal tension may be taken as 1.0 providing that:

- a) There is no visible evidence of any representative cracking in the webs.
- b) The capacity is satisfactory under the required Strength Limit State.

However, if during field inspection, cracks are discovered at or near a critical section where, by calculation, the principal tensile stress is found to be less than the allowable, then further study is recommended to determine the origin of the cracks and their significance to normal use of the structure. If possible, a check should be made of construction records to determine if there was any change of construction, temporary loads or support reactions that may have induced a significant but temporary local affect.

### 7.2.10 Reduced Structural (DC) Dead Load (Exception)

A lower dead load factor may be considered in accordance with the following criteria. Under no circumstance should this load factor be less than 1.10. For the self weight determined by:

- a) Design Plan or Shop Drawing dimensions and assumed average density for concrete, reinforcement and embedded items:  $\gamma_{DC} = 1.25$ .
- b) As-built dimensions, deck slab thickness and build-up using concrete density determined from construction records, adjusted for weight of embedded reinforcing:  $\gamma_{DC} = 1.15$ .
- c) Actual beam weights measured during construction:  $\gamma_{DC} = 1.10$ .

Cases (b) and (c) may only be used provided that neither additional structural component (DC) nor superimposed dead loads (DW) have been added whose weight cannot be accurately ascertained.

In using either (a) or (b) above, and when it is known that the original design was based on an assumed density for normal concrete and that a check or investigation can verify that a bridge has been constructed with Florida Limerock, then the unit weight may be reduced to 138 lbs per cubic foot for the concrete plus an allowance for the weight of steel.

## 7.3 Procedures for Posting of Weight Restrictions on Department Maintained Structures

If load rating calculations indicate that any of the Florida legal loads have an Operating Rating level less than 1.0, then the bridge must be posted for weight. A load test may be performed to determine if the actual stress levels induced by Florida legal loads are in excess of the operating rating stresses.

When weight restrictions on Department maintained structures are required, the following procedure shall be followed:

- a) To initiate weight limit restrictions, the recommendations shall be developed by the District Structures Maintenance Engineer and endorsed by the District Maintenance Engineer.

## 7 – Posting of Bridges and Posting Avoidance

August 2012

- b) The request for weight limit restrictions, load rating calculations, the load rating summary sheet, computer output or load test results and sign configuration are to be submitted to the Engineer of Maintenance Operations for processing through the Director of the Office of Maintenance to the Secretary of the Department of Transportation for approval. The recommendations should be accompanied by the following:
1. an explanation of the cause of the low rating
  2. what repairs are planned
  3. when the repairs will be performed
  4. will the repairs be performed by state resources or by contract
  5. the cost of repairs
  6. if and when the bridge is scheduled for rehabilitation or replacement
  7. what effect posting the bridge will have on local traffic and emergency vehicles, including detour routes for affected vehicles
- c) Upon approval of the weight limit restrictions, the District Traffic Operations Engineer and the State Load Rating Engineer shall be sent a copy of these restrictions. The District Traffic Operations Office shall notify the appropriate local governments that a weight limit regulation has been approved.
- d) A request for removal of weight limit restrictions shall be initiated by the District Structures Maintenance Engineer with the District Maintenance Engineer's approval. This request should indicate that the structure has been restored to legal load capacity. This request must be sent to the Engineer of Maintenance Operations for review. Before processing the request, the Office of Maintenance may perform a review of the load rating. Removal of weight limit restrictions must have the approval of the Secretary of the Department of Transportation, prior to removal of posting signs.
- e) If the bridge is permanently taken out of service, then the District Structures Maintenance Engineer must notify the Engineer of Maintenance Operations in writing of this occurrence so that the Office of Maintenance removes the bridge from the list of posted bridges.

- f) Weight limits to be shown on the posting signs at a bridge site, shall represent the gross vehicle weight (GVW) in tons for a maximum of three truck types. However, no more than one or two truck symbols may be needed. Bridge capacity is calculated for the SU4, C5 & ST5 trucks. A graphic depiction of the general weight limit is shown on the Standard Index No. 17357. The three truck types are as follows:
1. Single unit trucks.(SU2, SU3 or SU4)
  2. Combination trucks with a single trailer. (C3, C4 or C5)
  3. Combination trucks with two trailers or a single unit truck with one trailer. (ST5)
- g) The following are the requirements for weight limit signs:
1. The location and construction of weight limit posting signs shall be in accordance with the Design Standard Index No. 17357. This standard index has been prepared to meet or exceed the requirement established in Section 2B-41 of the Manual on Uniform Traffic Control Devices.
  2. After approval of the weight limit restrictions by the Secretary of the Department of Transportation, the District Maintenance Engineer shall solicit the recommendations of the District Traffic Operations Engineer for sign location and design.
  3. After receiving the District Traffic Operations Engineer's recommendations, the District Maintenance Engineer shall order the signs from the Lake City Sign Shop and request immediate installation of the signs upon delivery.
- h) Bona Fide Emergencies: In case of bona fide emergencies, the District Maintenance Engineer shall take the necessary steps to protect public safety. Corrective action may be initiated while seeking approval for weight limit posting. Such action may consist of restricting the traffic to certain lanes or posting the structure for no trucks or only trucks below a specified gross weight, while analysis and or repairs are performed and the official request is prepared and sent to the Engineer of Maintenance Operations. The Office of Maintenance and the Overweight/Over-Dimensional Permit Office should be notified in



7 – Posting of Bridges and Posting Avoidance

August 2012

writing of these temporary restrictions as well as the time the restrictions are lifted or modified.

- i) The bridge file should contain all pertinent information concerning posting and removal of posting actions.

#### **7.4 Procedures for Posting Weight Restrictions on Local Government Structures**

Local government agencies are responsible for load posting of their structures. The Department, or its consultant, may load rate local government structures. When local government structures require weight restrictions the following procedure shall be followed:

- a) The department, or its consultant, will develop recommendations for weight restrictions and notify the department's local government bridge inspection project manager.
- b) The project manager will send the recommendations for weight restrictions to the local government agency. The agency will be required to perform the necessary actions to post the structure. The agency shall notify the department that the bridge has been posted accordingly.
- c) If the required postings are not acted upon by the agency within 30 days after notification, the department shall post the bridge in accordance to the recommended weight restrictions immediately. All costs incurred by the department shall be assessed to the agency.
- d) The agency may elect to use their own resources or hire a consultant engineer to perform additional testing and/or analysis as described in Section 6 of this *Manual*. However; any additional analysis or testing shall not exempt the agency from taking the necessary steps to post the structure within the 30 days.
- e) The department shall be kept informed of all posting actions accomplished by the local government agency. This should include copies of all calculations and testing results.

Weight limit signs shall conform to the requirements stated in this *Manual*. Exceptions to these requirements may be approved by the project manager on a case by case basis.

## 8 Load Testing of Bridges

### 8.2 General

The department generally uses proof load testing as described in article 8.8.3 of the *MBE*. If this methodology is not used, then Table 8.8.2.3.1-1 shall establish the magnitude of the benefit.

When a load test has been performed on a structure the load ratings determined by the load test should be entered in the database.

Analysis methods by their very nature represent engineering approximations of the stresses in a structure. Assumptions are made at every step of the analysis process. For example, a steel girder without shear connectors is assumed to act non-compositely with the concrete deck. Experiments have shown that a girder without shear connectors will have a portion of the composite action of a girder with shear connectors. Stiffness provided to the deck by concrete barriers aids in distributing live load. The cumulative effects of these assumptions may result in actual safe load carrying capacity to be significantly larger than that calculated by analysis. These conservative assumptions are generally good in that they provide a safe conservative approach and simplify the analysis. For some critical structures, it may be desirable to establish a higher safe load carrying capacity. The following types of structures are candidates for load testing:

- a) Bridges that restrict the flow of overweight vehicles.
- b) Bridges that are posted for weight restrictions.
- c) Bridges that are difficult to analyze.
  
- d) Bridges for which plans are not available.

### 8.3 Load Test Candidate

Periodically, the State Load Rating Engineer in coordination with the District Structures Maintenance Engineers will develop a list of candidate bridges for load testing. Following is the process for the development of the load test candidate list.

The District Structures Maintenance Engineers will develop a list of bridges for load testing.

The District Structures Maintenance Engineer

### C8.1

The load test procedure is a process where a structure is instrumented and then subjected to a known test load which is progressively increased. This determines the safe carrying capacity by measuring the actual load the structure can carry without distress. Since even the most sophisticated analysis contains assumptions, this method is the most accurate. However, the process is expensive and time consuming and therefore should be selected judiciously. For a structure to be load tested it must be on the load test candidate list.

## 8 – Load Testing of Bridges

should assign a priority order to this list and submit the list to the State Load Rating Engineer who will compile a statewide list of bridges to be load tested, possibly adding bridges to the list considering routing and permitting requirements.

The State Load Rating Engineer will send the statewide list to the Structures Research Center.

The Structures Research Center will schedule the load tests with the Districts using the established priority ranking modified to reduce travel time from site-to-site.

The Structures Research Center will send the load test report within 60 days of completion of the field load test to the District Structures Maintenance Engineer with copies to the State Load Rating Engineer. If it is anticipated that the evaluation requires more time due to the complexity of the analyses performed, the Structures Research Center will provide a written notification to the Office of Maintenance including the anticipated date of completion.

The District Structures Maintenance Engineer will within 14 days enter the ratings from the load test reports into the database and Section D (Load Rating) of the Bridge Record.

### 8.4 Load Test Reports

Load Tests shall be performed in conformance with the direction provided in the current version of the "*Structures Manual*". The Structures Research Center will verify that the load tested span(s) control the load rating for the structure. Results should be obtained for a single lane loaded and then 2 lanes loaded simultaneously. The results obtained for single versus double lane loadings are important for permitting decisions. If a load test is performed on a bridge having a twin structure, the Research Center will state if the results apply to both structures. The load test report should at a minimum contain the following information, determined during the load test or assumed during the analysis of data gathered during the load test:

- a) Date load test performed.
- b) Brief description of bridge and condition.
- c) Controlling span and length.
- d) Rating controlled by shear, positive moment, or negative moment or other.
- e) Controlling element.
- f) Impact factor or Dynamic Load Allowance.

## 8 – Load Testing of Bridges

- g) Live load distribution factor.
- h) Truck(s) used for load test.
- i) General assumptions made.
- j) Load test static or dynamic.
- k) Available live load moment and shear.
- l) Applied moment and shear.
- m) Ratings for HS20 vehicle(s) as well as HL93 vehicle(s) and all Florida legal trucks.
- n) Longitudinal location of controlling axle.  
For GFS (Girder – Floor Beam - Stringer) systems as well as for transversely post-tensioned bridge decks, transverse location of controlling axles.
- o) Signature and Seal of the professional engineer performing the load test.

## 9 Permitting Operations

One of the most important internal recipients of the load rating information is the Permit Office which issues permits for overweight-over dimensional vehicles. The traveling public, as well as the commercial trucking industry, are directly impacted by the load rating values in the Pontis database. Based upon this Pontis information, the Office of Maintenance is responsible for making decisions about safe levels of permit truck weight allowed to cross the current bridge inventory.

However, to facilitate the mobility of certain types of vehicles and moves, the Office of Maintenance consults with the Districts to determine potential conflicts of a temporary nature. Examples of such conflict are:

- a) Temporary clearance restriction(s) due to widening.
- b) Time of movement occurring during higher levels of daily traffic.
- c) Local event generating an unusual level of traffic. The District Maintenance Engineers have designated a single contact person (and a back-up person) to coordinate comments provided on specific moves.

To allow the Permit Office to route vehicles over the inventoried routes, each District office shall provide to the Permit Office detailed “bridge” maps indicating the location and the number for each bridge included within the District. Each District shall provide to the Permit Office a set of 2 hard copies of those bridge maps until an electronic format is feasible. Updates to these maps should be provided at least every year.

## 10 Summary of Ratings

After the structure has been load rated, the “Load Rating Summary Tables” shall be completed, placed in Section D of the Bridge Record File and included in the contract plans (if applicable). The tables are shown in the Appendix of this *Manual* and are available in the Department’s Forms Library.

Instructions for completing the Load Rating Summary Tables:

- a) Determine the appropriate summary table to use.
- b) Fill in the date in General Note number 1.
- c) Answer questions in the table notes section where applicable. For prestressed members, modify notes to state the applicable tensile stress limit.
- d) Enter all data in the summary tables corresponding to the vehicle type or axle weight for both the longitudinal and transverse capacities. Transverse capacities are generally not required except for transversely post-tensioned deck slabs. Capacities for vehicles SU4, C5 and ST5 do not have to be calculated if the operating rating for HL-93 is equal to or greater than 1.0.
- e) Enter the span length of the member measured center-line to center-line bearing.
- f) In the comments section, state whether the rating is for bending strength, bending stress, shear strength or principal tension stress.
- g) Enter all additional comments as required to clarify the load capacity calculations.
- h) Modify the rating location sketch by dimensioning the span lengths to resemble the bridge being rated and labeling the locations of the ratings.
- i) Fill out the data for the Controlling Load Rating in the table adjacent to the rating location sketch.
- j) The responsible engineer will sign and seal the "Load Rating Summary Table".
- k) During the transition, software, procedures and manual have to be updated. Temporarily, if the *LRFR* rating result for HL93 (Design Inventory and operating levels) is expressed as a factor, the value entered in the bridge database (Pontis) should be the rating factor multiplied by 36 tons. If the results are already expressed as tonnage, enter directly the value obtained into the bridge database. The value for the FL120 should be entered as soon as the field is available in the bridge database. It is paramount that the proper rating method be accurately included in the bridge database. Error in the input may generate bridge overloading.

## Appendix A - LOAD RATING SUMMARY TABLES


<u>Page No.</u>	<u>Title – LRFR Load Rating Summary Table</u>
A-2	Reinforced Concrete Bridges (Part A)
A-3	Reinforced Concrete Bridges (Part B)
A-4	Prestressed Concrete Bridges (Part A)
A-5	Prestressed Concrete Bridges (Part B)
A-6	Steel Girder Bridges (Part A)
A-7	Steel Girder Bridges (Part B)
A-8	Continuous Post-Tensioned I-Girder Bridges (Part A)
A-9	Post-Tensioned Concrete Box Girder Bridges (Part A)
A-10	Reinforced Concrete Bridge Culverts (Part A)
A-11	Reinforced Concrete Bridge Culverts (Part B)



Bridge #		Load Rating Summary Details for Reinforced Concrete Bridges														Table Date 8/1/2011		
Level	Limit State	Vehicle	Weight (tons)	Load Factors			Moment (Strength)			Shear (Strength)			Member & Description (Interior or Exterior, Governing, Member Type, Etc.)	PONTIS Location	PONTIS Value (Tons)			
				LL	DC	DW	Distribution Factor (DF)	Rating Factor	Tons	Location	Dimension	Distribution Factor (DF)				Rating Factor	Tons	Location
Design Load Rating	Strength I (Op)	HL93	N/A	1.35	1.25	1.50										Operating Rating (84)	0.0	
	--			--	--	--	--	--	--	--	--	--	--	--	--			
	Strength I (Inv)			1.75	1.25	1.50											Inventory Rating (86)	0.0
Legal Load Rating	Strength I	SU2	17.0	1.35	1.25	1.50									Single Unit Truck 2 Axles	-1.0		
	--	--	--	--	--	--												
	Strength I	SU3	33.0	1.35	1.25	1.50									Single Unit Truck 3 Axles	-1.0		
	--	--	--	--	--	--												
	Strength I	SU4	35.0	1.35	1.25	1.50									Single Unit Truck 4 Axles	-1.0		
	--	--	--	--	--	--												
	Strength I	C3	28.0	1.35	1.25	1.50									Comb. Unit Truck 3 Axles	-1.0		
	--	--	--	--	--	--												
	Strength I	C4	36.7	1.35	1.25	1.50									Comb. Unit Truck 4 Axles	-1.0		
Permit Load Rating	Strength I	C5	40.0	1.35	1.25	1.50									Comb. Unit Truck 5 Axles	-1.0		
	--	--	--	--	--	--												
	Strength I	ST5	40.0	1.35	1.25	1.50									Truck Trailer 5 Axles	-1.0		
	--	--	--	--	--	--												
	Strength II	FL120	60.0	1.35	1.25	1.50									FL120 Long Gov Span	-1.0		
	--			--	--	--	--	--	--	--	--	--	--	--				
	Strength II			1.35	1.25	1.50										FL120 Long Max Span	-1.0	

Notes	Comments
<p>General Notes</p> <ol style="list-style-type: none"> <li>This table is based on the requirements established in the [Insert Year Here] "Bridge Load Rating Manual".</li> </ol> <p>Part A Notes</p> <ol style="list-style-type: none"> <li>Permit Capacity is determined by using the permit vehicle in all lanes.</li> <li>If the Design Operating Load Rating is greater than 1.4, Load Rating using Legal Vehicles SU2, SU3, SU4, C3, C4, C5, and ST5 is not required.</li> <li>Service III Design Inventory tensile stress limits = 3√f<sub>c</sub> or 6√f<sub>c</sub>. Service III Design Operating Legal, and Permit tensile stress limits = 7.5√f<sub>c</sub>.</li> <li>Has the AASHTO LRFD Specifications Article 5.8.3.5 longitudinal reinforcement been satisfied? <input type="checkbox"/> Yes <input type="checkbox"/> No</li> </ol> <p>Notes to Designer</p> <ol style="list-style-type: none"> <li>Modify or replace the Rating Location sketch showing Span Length(s) to resemble the bridge being rated.</li> </ol> <p>Additional Notes</p> <ol style="list-style-type: none"> <li>For each vehicle in the table, state whether the rating is for the interior or exterior member and whether or not that member governs.</li> <li>Cells shaded in this color will automatically populate based upon data provided in other fields (rating factor, bridge #, etc.) on this form.</li> <li>The value for "FL120 Gov Span Length" under Pontis Information should be placed into the "HS20 Gov Span Length" field in PONTIS.</li> </ol>	<p>HL93 (O.R.)</p> <p>HL93 (I.R.)</p> <p>SU2</p> <p>SU3</p> <p>SU4</p> <p>C3</p> <p>C4</p> <p>C5</p> <p>ST5</p> <p>FL120 (Gov)</p> <p>FL120 (Max)</p> <p>E.G.: DF method if other than LRFD, other appropriate comments, etc.</p>

PONTIS Information		Structure Number (8)		P.E. Information	
Load Rating Date		Reason for L.R.		Performed By/Date:	
Initials		Load Rating Origination		Checked By/Date:	
Load Distribution Factor		Method of Calculation		P.E. & FL P.E. Lic. #	
Impact Factor		Design Method		Physical Address:	
Design Load (31)				Email Address:	
Operating Type (63)				P.E. SEAL:	
Inventory Type (65)					
Main Type Material (43A)					
Main Type Design (43B)					
Approach Type Material (44A)					
Approach Type Design (44B)					
Open/Posted/Closed (41)					
Posting (70)		[5] AT/ABOVE LEGAL LOADS (1,000 up) (Not Required)			
Posting Recommendation	SU	99.0 tons	Load Ratings	FB Present	No
	C	99.0 tons	Operating Rating (84)	Gov FB Span	0.0 tons
	T	99.0 tons	Inventory Rating (86)	Gov FB Spacing	0.0 ft
	Posting Date		Single Unit Truck 2 Axles	FB HS20 Rating	0.0 tons
	Spans in Main Unit (45)	0	Single Unit Truck 3 Axles	FB SU4 Rating	0.0 tons
	Approach Spans (46)	0	Single Unit Truck 4 Axles	FB FL 120	0.0 tons
	FL120 Gov Span Length	0.0 ft	Comb. Unit Truck 3 Axles	FB CPR Rating Factor	
	Length of Max Span (48)	0.0 ft	Comb. Unit Truck 4 Axles	FB INV Rating Factor	
	Structure Length (49)	0.0 ft	Comb. Unit Truck 5 Axles	FL120 Long Gov Span	-1.0 tons
	Total Length	0.0 ft	Truck Trailer 5 Axles	FL120 Long Max Span	-1.0 tons

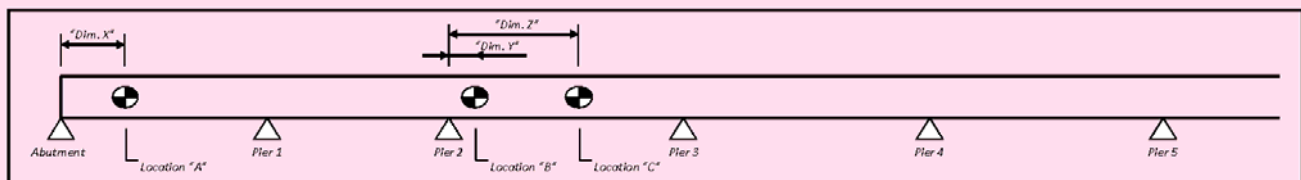


Bridge #	<b>Load Rating Summary Details for Reinforced Concrete Bridges</b>	Table Date 8/1/2011
----------	--	------------------------

Level	Vehicle	Weight (tons)	LRFR using Part B												Member & Description (Interior or Exterior, Governing, Member Type, Etc.)	PONTIS Location	PONTIS Value (Tons)		
			Load Factors		Moment (Strength)					Shear (Strength)									
			LL	DL	Distribution Factor (DF)	Rating Factor	Tens	Location	Dimension	Distribution Factor (DF)	Rating Factor	Tens	Location	Dimension					
Operating (Strength)	HS-20	36.0	1.30	1.30													O.R. (B4) (Gov Span)	0.0	
--			--	--															
Operating (Strength)			1.30	1.30														HS20 O.R. Max Span	-1.0
--			--	--															
Inventory (Strength)			2.17	1.30														Inventory Rating (66)	0.0
--	--	--																	
Operating (Strength)	SU2	17.0	1.30	1.30													Single Unit Truck 2 Axles	-1.0	
	SU3	33.0	1.30	1.30													Single Unit Truck 3 Axles	-1.0	
	SU4	35.0	1.30	1.30													Single Unit Truck 4 Axles	-1.0	
	C3	28.0	1.30	1.30													Comb. Unit Truck 3 Axles	-1.0	
	C4	36.7	1.30	1.30													Comb. Unit Truck 4 Axles	-1.0	
	C5	40.0	1.30	1.30													Comb. Unit Truck 5 Axles	-1.0	
	ST5	40.0	1.30	1.30													Truck Trailer 5 Axles	-1.0	

Notes		Comments
General Notes	1. This table is based on the requirements established in the [Insert Year Here] "Bridge Load Rating Manual".	HS20 (O.R.) (Gov) HS20 (O.R.) (Max) HS20 (I.R.) SU2 SU3 SU4 C3 C4 C5 ST5 E.G.: DF method if other than LRFD, other appropriate comments, etc.
Notes to Designer	2. Modify or replace the Rating Location sketch showing Span Length(s) to resemble the bridge being rated.	
Additional Notes	3. For each vehicle in the table, state whether the rating is for the interior or exterior member and whether or not that member governs.	
	4. Cells shaded in this color will automatically populate based upon data provided in other fields (rating factor, bridge #, etc.) on this form.	
Bridge Load Rating Manual & Bridge Management System (BMS) Coding Guide are available at: <a href="http://www.dot.state.fl.us/statemaintenanceoffice/StructuresOperations.shtml">http://www.dot.state.fl.us/statemaintenanceoffice/StructuresOperations.shtml</a>		


PONTIS Information		Structure Number (8)		P.E. Information		
Load Rating Date		Reason for L.R.		Performed By/Date:		
Initials		Load Rating Origination		Checked By/Date:		
Load Distribution Factor		Design Method		P.E. & FL P.E. Lic. #:		
Impact Factor		Method of Calculation		Physical Address:		
Design Load (31)				Email Address:		
Operating Type (63)				PE SEAL:		
Inventory Type (65)						
Main Type Material (43A)						
Main Type Design (43B)						
Approach Type Material (44A)						
Approach Type Design (44B)						
Open/Posted/Closed (41)						
Posting (70)		<b>[5] AT/ABOVE LEGAL LOADS (1,000 up) (Not Required)</b>				
Posting Recommendation	SU	99.0 tons	Load Ratings		Floor Beam (FB)	
	C	99.0 tons	Operating Rating (64) (Gov)	0.0 tons	FB Present	No
	T	99.0 tons	HS20 O.R. Max Span	-1.0 tons	Gov FB Span	Yes
			Inventory Rating (66)	0.0 tons	Gov FB Spacing	0.0 ft
	Posting Date		Single Unit Truck 2 Axles	-1.0 tons	FB HS20 Rating	0.0 tons
			Single Unit Truck 3 Axles	-1.0 tons	FB SU4 Rating	0.0 tons
			Single Unit Truck 4 Axles	-1.0 tons	FB FL 120	1.0 tons
			Comb. Unit Truck 3 Axles	-1.0 tons	FB CPR Rating Factor	
			Comb. Unit Truck 4 Axles	-1.0 tons	FB INV Rating Factor	
			Comb. Unit Truck 5 Axles	-1.0 tons	Truck Trailer 5 Axles	-1.0 tons

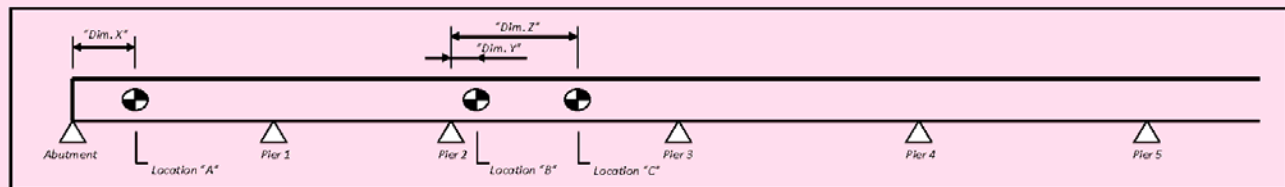

Bridge #		Load Rating Summary Details for Prestressed Concrete (Flat Slab & Deck/Girder) Bridges														Table Date 8/1/2011				
Level	Limit State	Vehicle	Weight (tons)	Load Factors			Moment (Strength) or Stress (Service)						Shear (Strength)			Member & Description (Interior or Exterior, Governing, Member Type, Etc.)	PONTIS Location	PONTIS Value (Tons)		
				LL	DC	DW	Distribution Factor (DF)	Rating Factor	Tons	Location	Dimension	Distribution Factor (DF)	Rating Factor	Tons	Location				Dimension	
Design Load Rating	Strength I (Op)	HL93	N/A	1.35	1.25	1.50												Operating Rating (84)	0.0	
	Service III (Op)			0.80	1.00	1.00						N/A	N/A	N/A	N/A	N/A				
	Strength I (Inv)			1.75	1.25	1.50													Inventory Rating (86)	0.0
	Service III (Inv)			0.80	1.00	1.00							N/A	N/A	N/A	N/A	N/A			
Legal Load Rating	Strength I	SU2	17.0	1.35	1.25	1.50											Single Unit Truck 2 Axles	-1.0		
	Service III	SU3	33.0	1.35	1.25	1.50											Single Unit Truck 3 Axles	-1.0		
	Service III			0.80	1.00	1.00						N/A	N/A	N/A	N/A	N/A				
	Strength I	SU4	35.0	1.35	1.25	1.50											Single Unit Truck 3 Axles	-1.0		
	Service III			0.80	1.00	1.00						N/A	N/A	N/A	N/A	N/A				
	Strength I	C3	28.0	1.35	1.25	1.50											Comb. Unit Truck 3 Axles	-1.0		
	Service III			0.80	1.00	1.00						N/A	N/A	N/A	N/A	N/A				
	Strength I	C4	36.7	1.35	1.25	1.50											Comb. Unit Truck 4 Axles	-1.0		
	Service III			0.80	1.00	1.00						N/A	N/A	N/A	N/A	N/A				
	Strength I	C5	40.0	1.35	1.25	1.50											Comb. Unit Truck 3 Axles	-1.0		
	Service III			0.80	1.00	1.00						N/A	N/A	N/A	N/A	N/A				
	Strength I	ST5	40.0	1.35	1.25	1.50											Truck Trailer 5 Axles	-1.0		
Service III	0.80			1.00	1.00						N/A	N/A	N/A	N/A	N/A					
Permit Load Rating	Strength II	FL120	60.0	1.35	1.25	1.50											FL120 Long Gov Span	-1.0		
	Service I			1.00	1.00	1.00						N/A	N/A	N/A	N/A	N/A				
	Strength II			1.35	1.25	1.50												FL120 Long Max Span	-1.0	
	Service I			1.00	1.00	1.00							N/A	N/A	N/A	N/A	N/A			

Notes	Comments
<p>General Notes</p> <ol style="list-style-type: none"> <li>This table is based on the requirements established in the [Insert Year Here] "Bridge Load Rating Manual".</li> </ol> <p>Part A Notes</p> <ol style="list-style-type: none"> <li>Permit Capacity is determined by using the permit vehicle in all lanes.</li> <li>If the Design Operating Load Rating is greater than 1.4, Load Rating using Legal Vehicles SU2, SU3, SU4, C3, C4, C5, and ST5 is not required.</li> <li>Service III Design Inventory tensile stress limits = 3√f<sub>c</sub> or 6√f<sub>c</sub>. Service III Design Operating Legal, and Permit tensile stress limits = 7.5√f<sub>c</sub>.</li> <li>Has the AASHTO LRFD Specifications Article 5.8.3.5 longitudinal reinforcement been satisfied? <input type="checkbox"/> Yes <input type="checkbox"/> No</li> </ol> <p>Notes to Designer</p> <ol style="list-style-type: none"> <li>Modify or replace the Rating Location sketch showing Span Length(s) to resemble the bridge being rated.</li> </ol> <p>Additional Notes</p> <ol style="list-style-type: none"> <li>For each vehicle in the table, state whether the rating is for the interior or exterior member and whether or not that member governs.</li> <li>Cells shaded in this color will automatically populate based upon data provided in other fields (rating factor, bridge #, etc.) on this form.</li> <li>The value for "FL120 Gov Span Length" under Pontis Information should be placed into the "HS20 Gov Span Length" field in PONTIS.</li> </ol>	<p>HL93 (O.R.)</p> <p>HL93 (I.R.)</p> <p>SU2</p> <p>SU3</p> <p>SU4</p> <p>C3</p> <p>C4</p> <p>C5</p> <p>ST5</p> <p>FL120 (Gov)</p> <p>FL120 (Max)</p> <p>E.G.: DF method if other than LRFD, other appropriate comments, etc.</p>

PONTIS Information		Structure Number (8)		P.E. Information	
Load Rating Date		Reason for L.R.		Performed By/Date:	
Initials		Load Rating Origination		Checked By/Date:	
Load Distribution Factor		Method of Calculation		P.E. & FL P.E. Lic. #	
Impact Factor		Design Method		Physical Address:	
Design Load (31)				Email Address:	
Operating Type (63)				P.E. SEAL:	
Inventory Type (65)					
Main Type Material (43A)					
Main Type Design (43B)					
Approach Type Material (44A)					
Approach Type Design (44B)					
Open/Posted/Closed (41)					
Posting (70)		[5] ABOVE LEGAL LOADS (1.000 up) (Not Required)			
Posting Recommendation	SU	99.0 tons	Load Ratings	FB Present	No
	C	99.0 tons	Operating Rating (84)	Gov FB Span	0.0 tons
	T	99.0 tons	Inventory Rating (86)	Gov FB Spacing	0.0 ft
	Posting Date		Single Unit Truck 2 Axles	FB HS20 Rating	0.0 tons
	Spans in Main Unit (45)	0	Single Unit Truck 3 Axles	FB SU4 Rating	0.0 tons
	Approach Spans (46)	0	Single Unit Truck 4 Axles	FB FL 120	0.0 tons
	FL120 Gov Span Length	0.0 ft	Comb. Unit Truck 3 Axles	FB CPR Rating Factor	
	Length of Max Span (48)	0.0 ft	Comb. Unit Truck 4 Axles	FB INV Rating Factor	
	Structure Length (49)	0.0 ft	Comb. Unit Truck 5 Axles	FL120 Long Gov Span	-1.0 tons
	Total Length	0.0 ft	Truck Trailer 5 Axles	FL120 Long Max Span	-1.0 tons

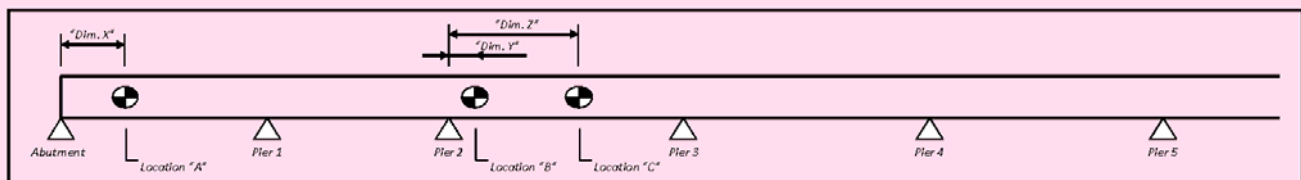


Bridge #	<b>Load Rating Summary Details for Prestressed Concrete (Flat Slab &amp; Deck/Girder) Bridges</b>	Table Date 8/1/2011
----------	---	------------------------

Level	Vehicle	Weight (tons)	LRFR using Part B													Member & Description (Interior or Exterior, Governing, Member Type, Etc.)	PONTIS Location	PONTIS Value (Tons)			
			Load Factors		Moment (Strength) or Stress (Service)					Shear (Strength)											
			LL	DL	Distribution Factor (DF)	Rating Factor	Tons	Location	Dimension	Distribution Factor (DF)	Rating Factor	Tons	Location	Dimension							
Operating (Strength)	HS-20	36.0	1.30	1.30														O.R. (B4) (Gov Span)	0.0		
Operating (Service)			1.00	1.00						N/A	N/A	N/A	N/A	N/A					HS20 O.R. Max Span	-1.0	
Operating (Strength)			1.30	1.30																	
Operating (Service)			1.00	1.00							N/A	N/A	N/A	N/A	N/A						
Inventory (Strength)			2.17	1.30																Inventory Rating (B6)	0.0
Inventory (Service)			1.00	1.00							N/A	N/A	N/A	N/A	N/A						
Operating (Strength)	SU2	17.0	1.30	1.30														Single Unit Truck 2 Axles	-1.0		
	SU3	33.0	1.30	1.30														Single Unit Truck 3 Axles	-1.0		
	SU4	35.0	1.30	1.30														Single Unit Truck 4 Axles	-1.0		
	C3	28.0	1.30	1.30														Comb. Unit Truck 3 Axles	-1.0		
	C4	36.7	1.30	1.30														Comb. Unit Truck 4 Axles	-1.0		
	C5	40.0	1.30	1.30														Comb. Unit Truck 5 Axles	-1.0		
	ST5	40.0	1.30	1.30														Truck Trailer 5 Axles	-1.0		

Notes		Comments
General Notes	1. This table is based on the requirements established in the [Insert Year Here] "Bridge Load Rating Manual".	HS20 (O.R.) (Gov) HS20 (O.R.) (Max) HS20 (I.R.) SU2 SU3 SU4 C3 C4 C5 ST5 E.G.: DF method if other than LRFD, other appropriate comments, etc.
Notes to Designer	2. Modify or replace the Rating Location sketch showing Span Length(s) to resemble the bridge being rated.	
Additional Notes	3. For each vehicle in the table, state whether the rating is for the interior or exterior member and whether or not that member governs.	
	4. Cells shaded in this color will automatically populate based upon data provided in other fields (rating factor, bridge #, etc.) on this form.	
Bridge Load Rating Manual & Bridge Management System (BMS) Coding Guide are available at: <a href="http://www.dot.state.fl.us/statemaintenanceoffice/StructuresOperations.shtm">http://www.dot.state.fl.us/statemaintenanceoffice/StructuresOperations.shtm</a>		


PONTIS Information		Structure Number (8)	P.E. Information	
Load Rating Date		Reason for L.R.	Performed By/Date:	
Initials		Load Rating Origination	Checked By/Date:	
Load Distribution Factor		Design Method	P.E. & FL P.E. Lic. #:	
Impact Factor		Method of Calculation	Physical Address:	
Design Load (31)			Email Address:	
Operating Type (63)			P.E. SEAL:	
Inventory Type (65)				
Main Type Material (43A)				
Main Type Design (43B)				
Approach Type Material (44A)				
Approach Type Design (44B)				
Open/Posted/Closed (41)				
Posting (70)	<b>(5) AT/ABOVE LEGAL LOADS (1,000 up) (Not Required)</b>			
Posting Recommendation	SU	99.0 tons	Load Ratings	Floor Beam (FB)
	C	99.0 tons	Operating Rating (B4) (Gov) 0.0 tons	FB Present No
	T	99.0 tons	HS20 O.R. Max Span -1.0 tons	Gov FB Span No
			Inventory Rating (B6) 0.0 tons	Gov FB Spacing No
Spans in Main Unit (45)	0	Single Unit Truck 2 Axles -1.0 tons	FB HS20 Rating -1.0 tons	
Approach Spans (46)	0	Single Unit Truck 3 Axles -1.0 tons	FB SU4 Rating -1.0 tons	
HS20 Gov Span Length	0.0 ft	Single Unit Truck 4 Axles -1.0 tons	FB FL 120 -1.0 tons	
Length of Max Span (48)	0.0 ft	Comb. Unit Truck 3 Axles -1.0 tons	FB CPR Rating Factor	
Structure Length (49)	0.0 ft	Comb. Unit Truck 4 Axles -1.0 tons	FB INV Rating Factor	
Total Length	0.0 ft	Comb. Unit Truck 5 Axles -1.0 tons	Truck Trailer 5 Axles -1.0 tons	

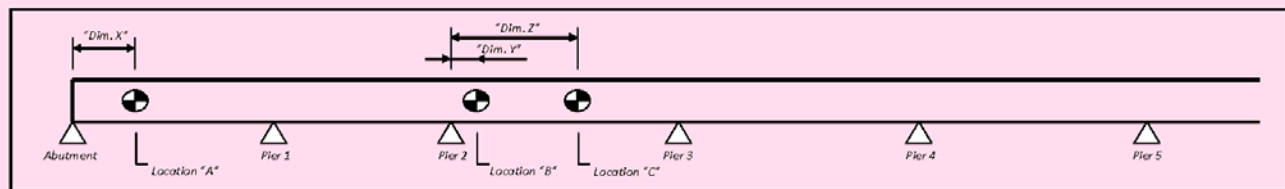

Bridge #		Load Rating Summary Details for Steel Girder Bridges														Table Date 8/1/2011				
Level	Limit State	Vehicle	Weight (tons)	Load Factors			Moment (Strength) or Stress (Service)					Shear (Strength)				Member & Description (Interior or Exterior, Governing, Member Type, Etc.)	PONTIS Location	PONTIS Value (Tons)		
				LL	DC	DW	Distribution Factor (DF)	Rating Factor	Tons	Location	Dimension	Distribution Factor (DF)	Rating Factor	Tons	Location				Dimension	
Design Load Rating	Strength I (Op)	HL93	N/A	1.35	1.25	1.50												Operating Rating (64)	0.0	
	Service II (Op)			1.00	1.00	1.00						N/A	N/A	N/A	N/A	N/A				
	Strength I (Inv)			1.75	1.25	1.50														
	Service II (Inv)			1.30	1.00	1.00							N/A	N/A	N/A	N/A	N/A			
Legal Load Rating	Strength I	SU2	17.0	1.35	1.25	1.50												Single Unit Truck 2 Axles	-1.0	
	Service II			1.30	1.00	1.00						N/A	N/A	N/A	N/A	N/A				
	Strength I	SU3	33.0	1.35	1.25	1.50												Single Unit Truck 3 Axles	-1.0	
	Service II			1.30	1.00	1.00						N/A	N/A	N/A	N/A	N/A				
	Strength I	SU4	35.0	1.35	1.25	1.50												Single Unit Truck 4 Axles	-1.0	
	Service II			1.30	1.00	1.00						N/A	N/A	N/A	N/A	N/A				
	Strength I	C3	28.0	1.35	1.25	1.50												Comb. Unit Truck 3 Axles	-1.0	
	Service II			1.30	1.00	1.00						N/A	N/A	N/A	N/A	N/A				
	Strength I	C4	36.7	1.35	1.25	1.50												Comb. Unit Truck 4 Axles	-1.0	
	Service II			1.30	1.00	1.00						N/A	N/A	N/A	N/A	N/A				
	Strength I	C5	40.0	1.35	1.25	1.50												Comb. Unit Truck 5 Axles	-1.0	
	Service II			1.30	1.00	1.00						N/A	N/A	N/A	N/A	N/A				
Strength I	ST5	40.0	1.35	1.25	1.50												Truck Trailer 5 Axles	-1.0		
Service II			1.30	1.00	1.00						N/A	N/A	N/A	N/A	N/A					
Permit Load Rating	Strength II	FL120	60.0	1.35	1.25	1.50												FL120 Long Gov Span	-1.0	
	Service II			0.90	1.00	1.00						N/A	N/A	N/A	N/A	N/A				
	Strength II			1.35	1.25	1.50														
	Service II			0.90	1.00	1.00							N/A	N/A	N/A	N/A	N/A			

Notes		Comments
General Notes	1. This table is based on the requirements established in the [Insert Year Here] "Bridge Load Rating Manual".	HL93 (O.R.)
Part A Notes	2. Permit Capacity is determined by using the permit vehicle in all lanes.	HL93 (I.R.)
	3. If the Design Operating Load Rating is greater than 1.4, Load Rating using Legal Vehicles SU2, SU3, SU4, C3, C4, C5, and ST5 is not required.	SU2
Notes to Designer	4. Modify or replace the Rating Location sketch showing Span Length(s) to resemble the bridge being rated.	SU3
	5. For Girder, Floorbeam, and Stringer Bridges, use one summary sheet for each member type. <input type="checkbox"/> Yes <input type="checkbox"/> No	SU4
	6. Design Service Limit State ratings are only for compact members.	C3
	7. Modify the tables to include transverse ratings in accordance with the "Bridge Load Rating Manual", if necessary.	C4
Additional Notes	8. For each vehicle in the table, state whether the rating is for the interior or exterior member and whether or not that member governs.	C5
	9. Cells shaded in this color will automatically populate based upon data provided in other fields (rating factor, bridge #, etc.) on this form.	ST5
	10. The value for "FL120 Gov Span Length" under Pontis Information should be placed into the "HS20 Gov Span Length" field in PONTIS.	FL120 (Gov)
Bridge Load Rating Manual & Bridge Management System (BMS) Coding Guide are available at <a href="http://www.dot.state.fl.us/statemaintenanceoffice/StructuresOperations.shtml">http://www.dot.state.fl.us/statemaintenanceoffice/StructuresOperations.shtml</a>		FL120 (Max)
		E.G.: DF method if other than LRFD, other appropriate comments, etc.

PONTIS Information			Structure Number (8)	P.E. Information		
Load Rating Date	Reason for L.R.			Performed By/Date:		
Initials	Load Rating Origination			Checked By/Date:		
Load Distribution Factor	Method of Calculation			P.E. & FL P.E. Lic. #		
Impact Factor	Design Method			Physical Address:		
Design Load (31)				Email Address:		
Operating Type (63)				P.E. SEAL:		
Inventory Type (65)						
Main Type Material (43A)						
Main Type Design (43B)						
Approach Type Material (44A)						
Approach Type Design (44B)						
Open/Posted/Closed (41)						
Posting (70)	[6] AT/ABOVE LEGAL LOADS (1,000 up) (Not Required)					
Posting Recommendation	SU	99.0 tons	Load Ratings		FB Present	No
	C	99.0 tons	Operating Rating (64)	0.0 tons	Gov FB Span	0.0 tons
	T	99.0 tons	Inventory Rating (66)	0.0 tons	Gov FB Spacing	0.0 ft
	Posting Date		Single Unit Truck 2 Axles	-1.0 tons	FB HS20 Rating	0.0 tons
	Spans in Main Unit (45)	0	Single Unit Truck 3 Axles	-1.0 tons	FB SU4 Rating	0.0 tons
	Approach Spans (46)	0	Single Unit Truck 4 Axles	-1.0 tons	FB FL 120	0.0 tons
	FL120 Gov Span Length	0.0 ft	Comb. Unit Truck 3 Axles	-1.0 tons	FB OPR Rating Factor	
	Length of Max Span (48)	0.0 ft	Comb. Unit Truck 4 Axles	-1.0 tons	FB INV Rating Factor	
	Structure Length (49)	0.0 ft	Comb. Unit Truck 5 Axles	-1.0 tons	FL120 Long Gov Span	-1.0 tons
	Total Length	0.0 ft	Truck Trailer 5 Axles	-1.0 tons	FL120 Long Max Span	-1.0 tons

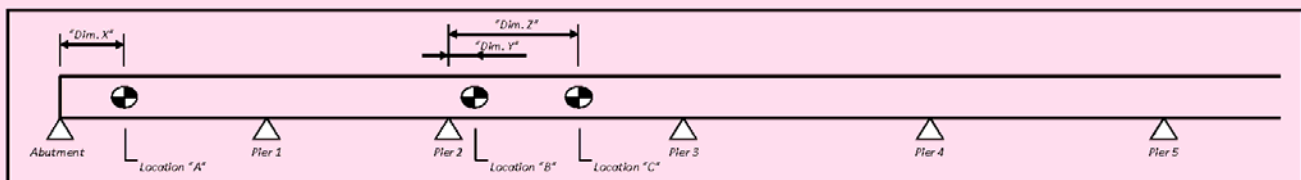


Bridge #	<b>Load Rating Summary Details for Steel Girder Bridges</b>	Table Date 8/1/2011
----------	---	------------------------

Level	Vehicle	Weight (tons)	LRFR using Part B												Member & Description (Interior or Exterior, Governing, Member Type, Etc.)	PONTIS Location	PONTIS Value (Tons)			
			Load Factors		Moment (Strength)					Shear (Strength)										
			LL	DL	Distribution Factor (DF)	Rating Factor	Tons	Location	Dimension	Distribution Factor (DF)	Rating Factor	Tons	Location	Dimension						
Operating (Strength)	HS-20	36.0	1.30	1.30													O.R. (B4) (Gov Span)	0.0		
--			--	--	--															
Operating (Strength)			1.30	1.30															HS20 O.R. Max Span	-1.0
--			--	--	--															
Inventory (Strength)			2.17	1.30															Inventory Rating (B6)	0.0
--	--	--	--																	
Operating (Strength)	SU2	17.0	1.30	1.30														Single Unit Truck 2 Axles	-1.0	
	SU3	33.0	1.30	1.30														Single Unit Truck 3 Axles	-1.0	
	SU4	35.0	1.30	1.30														Single Unit Truck 4 Axles	-1.0	
	C3	28.0	1.30	1.30														Comb. Unit Truck 3 Axles	-1.0	
	C4	36.7	1.30	1.30														Comb. Unit Truck 4 Axles	-1.0	
	C5	40.0	1.30	1.30														Comb. Unit Truck 5 Axles	-1.0	
	ST5	40.0	1.30	1.30														Truck Trailer 5 Axles	-1.0	

Notes		Comments
General Notes	1. This table is based on the requirements established in the [Insert Year Here] "Bridge Load Rating Manual".	HS20 (O.R.) (Gov) HS20 (O.R.) (Max) HS20 (I.R.) SU2 SU3 SU4 C3 C4 C5 ST5 E.G.: DF method if other than LRFD, other appropriate comments, etc.
Notes to Designer	2. Modify or replace the Rating Location sketch showing Span Length(s) to resemble the bridge being rated. 3. For Girder, Floorbeam, and Stringer bridges, use one summary sheet for each member type. 4. Design Service Limit State Ratings are only for compact members.	
Additional Notes	5. Modify the tables to include transverse ratings in accordance with the "Bridge Load Rating Manual", if necessary. 6. For each vehicle in the table, state whether the rating is for the interior or exterior member and whether or not that member governs. 7. Cells shaded in this color will automatically populate based upon data provided in other fields (rating factor, bridge #, etc.) on this form.	
Bridge Load Rating Manual & Bridge Management System (BMS) Coding Guide are available at: <a href="http://www.dot.state.fl.us/statemaintenanceoffice/StructuresOperations.shtm">http://www.dot.state.fl.us/statemaintenanceoffice/StructuresOperations.shtm</a>		


PONTIS Information		Structure Number (8)		P.E. Information	
Load Rating Date		Reason for L.R.		Performed By/Date:	
Initials		Load Rating Origination		Checked By/Date:	
Load Distribution Factor		Design Method		P.E. & FL P.E. Lic. #:	
Impact Factor		Method of Calculation		Physical Address:	
Design Load (31)				Email Address:	
Operating Type (63)				P.E. SEAL:	
Inventory Type (65)					
Main Type Material (43A)					
Main Type Design (43B)					
Approach Type Material (44A)					
Approach Type Design (44B)					
Open/Posted/Closed (41)					
Posting (70)	<b>(5) AT/ABOVE LEGAL LOADS (1,000 up) (Not Required)</b>				
Posting Recommendation	SU	99.0 tons	Load Ratings		Floor Beam (FB)
	C	99.0 tons	Operating Rating (B4) (Gov)	0.0 tons	FB Present No
	T	99.0 tons	HS20 O.R. Max Span	-1.0 tons	Gov FB Span
			Inventory Rating (B6)	0.0 tons	Gov FB Spacing
Spans in Main Unit (45)	0	Single Unit Truck 2 Axles	-1.0 tons	FB HS20 Rating	-1.0 tons
Approach Spans (46)	0	Single Unit Truck 3 Axles	-1.0 tons	FB SU4 Rating	-1.0 tons
HS20 Gov Span Length	0.0 ft	Single Unit Truck 4 Axles	-1.0 tons	FB FL 120	-1.0 tons
Length of Max Span (48)	0.0 ft	Comb. Unit Truck 3 Axles	-1.0 tons	FB CPR Rating Factor	
Structure Length (49)	0.0 ft	Comb. Unit Truck 4 Axles	-1.0 tons	FB INV Rating Factor	
Total Length	0.0 ft	Comb. Unit Truck 5 Axles	-1.0 tons	Truck Trailer 5 Axles	-1.0 tons

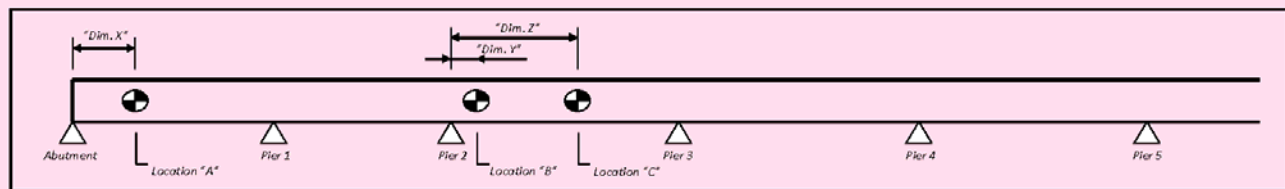

Bridge #		Load Rating Summary Details for Continuous Post-Tensioned I-Girder Bridges														Table Date 8/1/2011				
LRFR using Part A																				
Level	Limit State	Vehicle	Weight (tons)	Load Factors			Moment (Strength) or Stress (Service)						Shear (Strength)			Member & Description (Interior or Exterior, Governing, Member Type, Etc.)	PONTIS Location	PONTIS Value (Tons)		
				LL	DC	DW	Distribution Factor (DF)	Rating Factor	Tons	Location	Dimension	Distribution Factor (DF)	Rating Factor	Tons	Location				Dimension	
Design Load Rating	Strength I (Op)	HL93	N/A	1.35	1.25	1.50											Operating Rating (84)	0.0		
	Service III (Op)			0.80	1.00	1.00														
	Strength I (Inv)			1.75	1.25	1.50													Inventory Rating (86)	0.0
	Service III (Inv)			0.80	1.00	1.00														
Legal Load Rating	Strength I	SU2	17.0	1.35	1.25	1.50										Single Unit Truck 2 Axles	-1.0			
	Service III			0.80	1.00	1.00														
	Strength I	SU3	33.0	1.35	1.25	1.50										Single Unit Truck 3 Axles	-1.0			
	Service III			0.80	1.00	1.00														
	Strength I	SU4	35.0	1.35	1.25	1.50										Single Unit Truck 4 Axles	-1.0			
	Service III			0.80	1.00	1.00														
	Strength I	C3	28.0	1.35	1.25	1.50										Comb. Unit Truck 3 Axles	-1.0			
	Service III			0.80	1.00	1.00														
	Strength I	C4	36.7	1.35	1.25	1.50										Comb. Unit Truck 4 Axles	-1.0			
	Service III			0.80	1.00	1.00														
	Strength I	C5	40.0	1.35	1.25	1.50										Comb. Unit Truck 5 Axles	-1.0			
	Service III			0.80	1.00	1.00														
Permit Load Rating	Strength I	ST5	40.0	1.35	1.25	1.50										Truck Trailer 5 Axles	-1.0			
	Service I			1.00	1.00	1.00														
	Strength II	FL120	60.0	1.35	1.25	1.50										FL120 Long Gov Span	-1.0			
	Service I			1.00	1.00	1.00										FL120 Long Max Span	-1.0			

Notes		Comments
General Notes	1. This table is based on the requirements established in the [Insert Year Here] "Bridge Load Rating Manual".	HL93 (O.R.)
Part A Notes	2. Permit Capacity is determined by using the permit vehicle in all lanes.	HL93 (I.R.)
	3. If the Design Operating Load Rating is greater than 1.4, Load Rating using Legal Vehicles SU2, SU3, SU4, C3, C4, C5, and ST5 is not required.	SU2
	4. Service III Design Inventory tensile stress limits = 3√fc or 6√fc. Service III Design Operating Legal, and Permit tensile stress limits = 7.5√fc.	SU3
	5. Has the AASHTO LRFD Specifications Article 5.8.3.5 longitudinal reinforcement been satisfied? <input type="checkbox"/> Yes <input type="checkbox"/> No	SU4
Notes to Designer	6. Modify or replace the Rating Location sketch showing Span Length(s) to resemble the bridge being rated.	C3
Additional Notes	7. For each vehicle in the table, state whether the rating is for the interior or exterior member and whether or not that member governs.	C4
	8. Cells shaded in this color will automatically populate based upon data provided in other fields (rating factor, bridge #, etc.) on this form.	C5
	9. The value for "FL120 Gov Span Length" under Pontis Information should be placed into the "HS20 Gov Span Length" field in PONTIS.	ST5
Bridge Load Rating Manual & Bridge Management System (BMS) Coding Guide are available at <a href="http://www.dot.state.fl.us/statemaintenanceoffice/StructuresOperations.shtml">http://www.dot.state.fl.us/statemaintenanceoffice/StructuresOperations.shtml</a>		FL120 (Gov) FL120 (Max)
		E.G.: DF method if other than LRFD, other appropriate comments, etc.



PONTIS Information			P.E. Information			
Load Rating Date	Structure Number (8)		Performed By/Date:			
Initials	Reason for L.R.		Checked By/Date:			
Load Distribution Factor	Load Rating Origination		P.E. & FL P.E. Lic. #			
Impact Factor	Method of Calculation		Physical Address:			
Design Load (31)	Design Method		Email Address:			
Operating Type (63)			P.E. SEAL:			
Inventory Type (65)						
Main Type Material (43A)						
Main Type Design (43B)						
Approach Type Material (44A)						
Approach Type Design (44B)						
Open/Posted/Closed (41)						
Posting (70)	[5] ABOVE LEGAL LOADS (1.000 up) (Not Required)					
Posting Recommendation	SU	99.0 tons	Load Ratings		FB Present	No
	C	99.0 tons	Operating Rating (84)	0.0 tons	Gov FB Span	0.0 tons
	T	99.0 tons	Inventory Rating (86)	0.0 tons	Gov FB Spacing	0.0 ft
	Posting Date		Single Unit Truck 2 Axles	-1.0 tons	FB HS20 Rating	0.0 tons
	Spans in Main Unit (45)	0	Single Unit Truck 3 Axles	-1.0 tons	FB SU4 Rating	0.0 tons
	Approach Spans (46)	0	Single Unit Truck 4 Axles	-1.0 tons	FB FL 120	0.0 tons
	FL120 Gov Span Length	0.0 ft	Comb. Unit Truck 3 Axles	-1.0 tons	FB CPR Rating Factor	
	Length of Max Span (48)	0.0 ft	Comb. Unit Truck 4 Axles	-1.0 tons	FB INV Rating Factor	
	Structure Length (49)	0.0 ft	Comb. Unit Truck 5 Axles	-1.0 tons	FL120 Long Gov Span	-1.0 tons
	Total Length	0.0 ft	Truck Trailer 5 Axles	-1.0 tons	FL120 Long Max Span	-1.0 tons

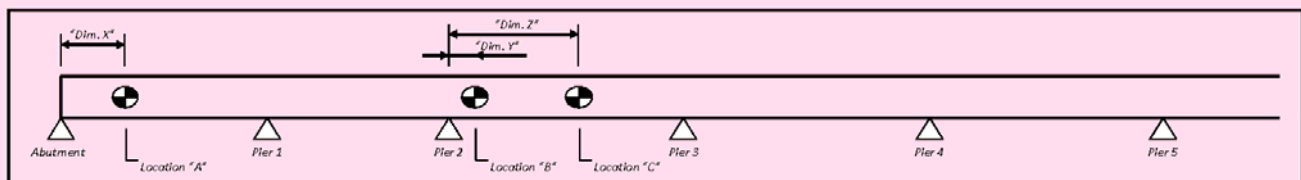

Bridge #		Load Rating Summary Details for Post-Tensioned Concrete Box Girder (Segmental) Bridges																Table Date 8/1/2011								
Level	Direction	Limit State	Vehicle	Weight (tons)	Load Factors										Moment (Strength) or Stress (Service)				Shear (Strength)				Member & Description (Interior or Exterior, Governing, Member Type, Etc.)	PONTIS Location	PONTIS Value (Tons)	
					LL	DC	DW	EL	FR	TU CR SH	TG	Rating Factor	Tens	Location	Dimension	Rating Factor	Tens	Location	Dimension							
Design Load Rating	Longitudinal	Strength I (Op)	HL93	N/A	1.35	1.25	1.50					0.50	N/A										Operating Rating (64)	0.0		
		Service III (Op)				1.0 SL	1.00	1.00	1.00															Inventory Rating (66)	0.0	
		Strength I (Inv)				1.75	1.25	1.50					0.50	N/A												
		Service III (Inv)				0.80	1.00	1.00					1.00	0.50												
		Service I (Op)				1.35	1.25	1.50																		
	Transverse	Service I (Op)	single axle	16.0		1.00	1.00	1.00	1.00	N/A	N/A	N/A												Single Axle Trans.	-1.0	
		Service I (Inv)				1.75	1.25	1.50																		
		Service I (Inv)				1.00	1.00	1.00																		
		Service I (Op)	tandem axle	25.0		1.35	1.25	1.50	1.00	N/A	N/A	N/A												Tandem Axle Trans.	-1.0	
		Service I (Inv)				1.75	1.25	1.50																		
Legal Load Rating	Longitudinal	Strength I	SU2	17.0	1.35	1.25	1.50	1.00	1.00	0.50	N/A												Single Unit Truck 2 Axles	-1.0		
		Service III				1.0 SL	1.00	1.00																		
		Strength I	SU3	33.0	1.35	1.25	1.50	1.00	1.00	0.50	N/A													Single Unit Truck 3 Axles	-1.0	
		Service III				1.0 SL	1.00	1.00																		
		Strength I	SU4	35.0	1.35	1.25	1.50	1.00	1.00	0.50	N/A													Single Unit Truck 4 Axles	-1.0	
		Service III				1.0 SL	1.00	1.00																		
		Strength I	C3	28.0	1.35	1.25	1.50	1.00	1.00	0.50	N/A													Comb. Unit Truck 3 Axles	-1.0	
		Service III				1.0 SL	1.00	1.00																		
		Strength I	C4	36.7	1.35	1.25	1.50	1.00	1.00	0.50	N/A													Comb. Unit Truck 4 Axles	-1.0	
		Service III				1.0 SL	1.00	1.00																		
Permit Load Rating	Longitudinal	Strength I	C5	40.0	1.35	1.25	1.50	1.00	1.00	0.50	N/A												Comb. Unit Truck 5 Axles	-1.0		
		Service III				1.0 SL	1.00	1.00																		
		Strength I	ST5	40.0	1.35	1.25	1.50	1.00	1.00	0.50	N/A													Truck Trailer 5 Axles	-1.0	
		Service III				1.0 SL	1.00	1.00																		
		Strength II	FL120	60.0	1.35	1.25	1.50	1.00	1.00	0.50	N/A													FL120 Long Gov Span	-1.0	
		Service III				0.9 SL	1.00	1.00																		
		Strength II				1.35	1.25	1.50																	FL120 Long Max Span	-1.0
		Service III				0.9 SL	1.00	1.00																		

Notes	Comments
<p>General Notes</p> <ol style="list-style-type: none"> <li>This table is based on the requirements established in the [Insert Year Here] "Bridge Load Rating Manual".</li> <li>Permit Capacity is determined by using the permit vehicle in all lanes.</li> <li>If the Design Operating Load Rating is greater than 1.4, Load Rating using Legal Vehicles SU2, SU3, SU4, C3, C4, C5, and ST5 is not required</li> <li>Service III tensile stress limit = 3√f'c or 6√f'c; Service III principal tension stress limit = 3.5√f'c.</li> <li>Service I Transverse Design Inventory tensile stress limit = 3√f'c or 6√f'c; Service I Transverse Design Operating tensile stress limit = 6√f'c.</li> </ol> <p>Notes to Designer</p> <ol style="list-style-type: none"> <li>Modify or replace the Rating Location sketch showing Span Length(s) to resemble the bridge being rated.</li> <li>In the comments section for Service Limit III, state whether the rating is for principal tension stress or bending stress.</li> </ol> <p>Additional Notes</p> <ol style="list-style-type: none"> <li>For Single Axle &amp; Tandem Axle Transverse, Rating Factor must be determined using location # 1, 2, or 3 in the drawing below.</li> <li>For each vehicle in the table, state whether the rating is for the interior or exterior member and whether or not that member governs.</li> <li>Cells shaded in this color will automatically populate based upon data provided in other fields (rating factor, bridge #, etc.) on this form.</li> <li>The value for "FL120 Gov Span Length" under Pontis Information should be placed into the "H520 Gov Span Length" field in PONTIS.</li> </ol> <p>Bridge Load Rating Manual &amp; Bridge Management System (BMS) Coding Guide are available at: <a href="http://www.dot.state.fl.us/stamaintenanceoffice/StructuresOperations.shtm">http://www.dot.state.fl.us/stamaintenanceoffice/StructuresOperations.shtm</a></p>	<p>HL93 (O.R.) HL93 (I.R.) Single Axle Trans. Tandem Axle Trans. SU2 SU3 SU4 C3 C4 C5 ST5 FL120 (Gov) FL120 (Max)</p> <p>E.O. : DF method if other than LRFD, other appropriate comments, etc.</p>

PONTIS Information			Structure Number (8)			P.E. Information		
Load Rating Date	Reason for L.R.			Performed By:				
Initials	Load Rating Origination			Date Performed:				
Load Distribution Factor	Design Method			Checked By:				
Impact Factor	Method of Calculation			Date Checked:				
Design Load (31)				Responsible P.E.:				
Operating Type (63)				FL P.E. License #:				
Inventory Type (65)				Physical Address:				
Main Type Material (43A)				Email Address:				
Main Type Design (43B)	<b>[21] Segmental Box Girder</b>			P.E. SEAL:				
Approach Type Material (44A)								
Approach Type Design (44B)								
Open/Posted/Closed (41)								
Posting (70)	<b>[5] AT/ABOVE LEGAL LOADS (1,000 up) (Not Required)</b>							
Recommend	Web to Web Span			Spans in Main Unit (45)				
SU	0.00 ft			0				
C	99.0 tons			Approach Spans (46)				
T	99.0 tons			0				
Posting Date	FL120 Trans			FL120 Gov Span Length				
	0.00 ft			0.00 ft				
				Length of Max Span (19)				
				0.00 ft				
				Structure Length (49)				
				0.00 ft				
				Total Length				
				0.00 ft				
				FL120 Long Gov Span				
				-1.0 tons				
				FL120 Long Max Span				
				-1.0 tons				

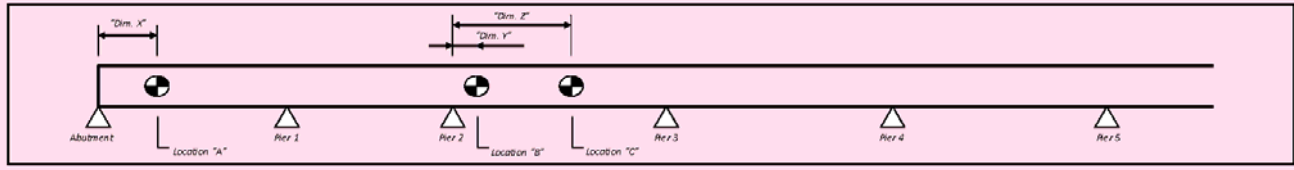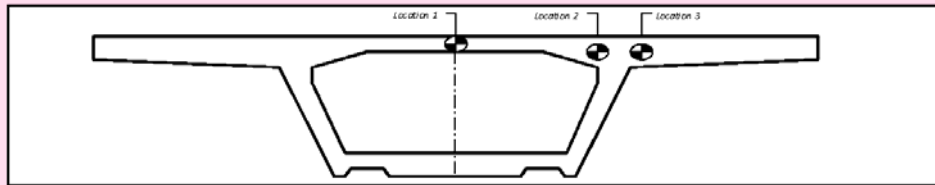




Bridge #		Load Rating Summary Details for Reinforced Concrete Bridge Culverts (Box & 3-Sided Culvert)														Table Date 8/1/2011			
LRFR using Part A																			
Level	Limit State	Vehicle	Weight (tons)	Load Factors			Moment (Strength)					Shear (Strength)					Member & Description (Interior or Exterior, Governing, Member Type, Etc.)	PONTIS Location	PONTIS Value (Tons)
				LL	DC	DW	Unfactored Ratio L/PL	Rating Factor	Tons	Location	Dimension	Unfactored Ratio L/PL	Rating Factor	Tons	Location	Dimension			
Design Load Rating	Strength I (Op)	HL93	N/A	1.35	1.25	1.50												Operating Rating (64)	0.0
	Strength I (Inv)			1.75	1.25	1.50												Inventory Rating (66)	0.0
Legal Load Rating	Strength I	SU2	17.0	1.35	1.25	1.50												Single Unit Truck 2 Axles	-1.0
		SU3	33.0	1.35	1.25	1.50												Single Unit Truck 3 Axles	-1.0
		SU4	35.0	1.35	1.25	1.50												Single Unit Truck 4 Axles	-1.0
		C3	28.0	1.35	1.25	1.50												Comb. Unit Truck 3 Axles	-1.0
		C4	36.7	1.35	1.25	1.50												Comb. Unit Truck 4 Axles	-1.0
		C5	40.0	1.35	1.25	1.50												Comb. Unit Truck 5 Axles	-1.0
		ST5	40.0	1.35	1.25	1.50												Truck Trailer 5 Axles	-1.0
Permit Load Rating	Strength II	FL120	60.0	1.35	1.25	1.50												FL120 Long Gov Span	-1.0
				1.35	1.25	1.50													FL120 Long Max Span

Notes		Comments
General Notes	1. This table is based on the requirements established in the [Insert Year Here] "Bridge Load Rating Manual".	HL93 (O.R.)
Part A Notes	2. Permit Capacity is determined by using the permit vehicle in all lanes.	HL93 (I.R.)
	3. If the Design Operating Load Rating is greater than 1.4, Load Rating using Legal Vehicles SU2, SU3, SU4, C3, C4, C5, and ST5 is not required.	SU2
	4. Does the depth of fill above the top slab exceed the span length between the inside faces of the end walls (bridge culvert total span length)? ___ Yes ___ No (If Yes, then the live load may be neglected per LRFD 3.6.1.2.6)	SU3
Notes to Designer	5. Modify or replace the Rating Location Sketch showing Span Length(s) to resemble the bridge being rated.	SU4
Additional Notes	6. For each vehicle in the table, state whether the rating is for the interior or exterior member and whether or not that member governs.	C3
	7. Cells shaded in this color will automatically populate based upon data provided in other fields (rating factor, bridge #, etc.) on this form.	C4
	8. For each vehicle in the table, state whether the rating is for the interior or exterior member and whether or not that member governs.	C5
	9. The value for "FL120 Gov Span Length" under Pontis Information should be placed into the "HS20 Gov Span Length" field in PONTIS.	ST5
Bridge Load Rating Manual & Bridge Management System (BMS) Coding Guide are available at: <a href="http://www.dot.state.fl.us/state/maintenanceoffice/Structures/Operations.shtml">http://www.dot.state.fl.us/state/maintenanceoffice/Structures/Operations.shtml</a>		FL120 (Gov)
		FL120 (Max)
		E.C.: DF method if other than LRFD, other appropriate comments, etc.

PONTIS Information		Structure Number (6)	P.E. Information	
Load Rating Date	Reason for L.R.		Performed By/Date:	
Initials	Load Rating Origination		Checked By/Date:	
Load Distribution Factor	Design Method		P.E. & FL P.E. Lic. #:	
Impact Factor	Method of Calculation		Physical Address:	
Design Load (31)			Email Address:	
Operating Type (63)			P.E. SEAL:	
Inventory Type (65)				
Main Type Material (43A)				
Main Type Design (43B)	[19] Culvert (includes frame culverts)			
Approach Type Material (44A)				
Approach Type Design (44B)				
Culvert Type				
Open/Posted/Closed (41)				
Posting (70)	[5] AT/ABOVE LEGAL LOADS (1,000 up) (Not Required)			
Posting Date	Recommend	SU 99.0 tons	C 99.0 tons	T 99.0 tons
Spans in Main Unit (45)	0	Load Ratings		Single Unit Truck 2 Axles -1.0 tons
Approach Spans (46)	0	Operating Rating (64) 0.0 tons	Single Unit Truck 3 Axles	-1.0 tons
FL120 Gov Span Length	0.0 ft	Inventory Rating (66) 0.0 tons	Single Unit Truck 4 Axles	-1.0 tons
Length of Max Span (48)	0.0 ft	FL120 Long Gov Span -1.0 tons	Comb. Unit Truck 3 Axles	-1.0 tons
Structure Length (49)	0.0 ft	FL120 Long Max Span -1.0 tons	Comb. Unit Truck 4 Axles	-1.0 tons
Total Length	0.0 ft	Truck Trailer 5 Axles -1.0 tons	Comb. Unit Truck 5 Axles	-1.0 tons

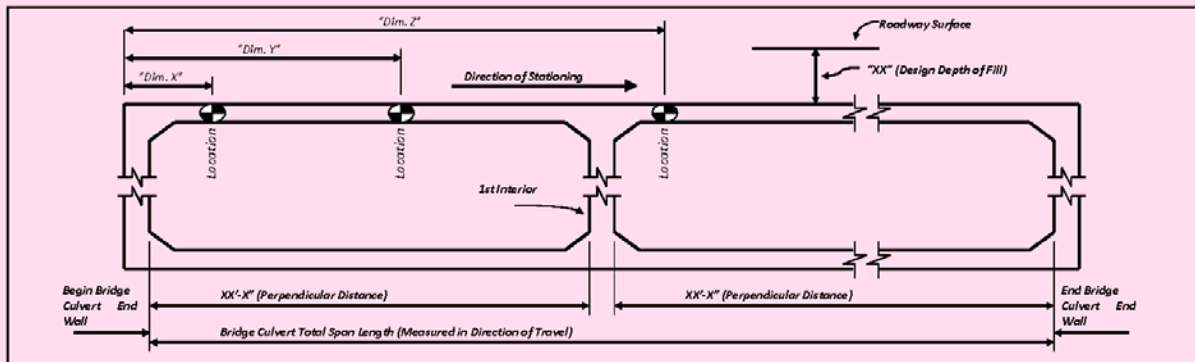

Bridge #	<b>Load Rating Summary Details for Reinforced Concrete Bridge Culverts (Box &amp; 3-Sided Culvert)</b>	Table Date 8/1/2011
----------	--	------------------------

LRFR using Part B																
Level	Vehicle	Weight (tons)	Load Factors		Moment (Strength)				Shear (Strength)				Member & Description (Interior or Exterior, Governing, Member Type, Etc.)	PONTIS Location	PONTIS Value (Tons)	
			LL	DL	Unfactored Ratio LL/DL	Rating Factor	Tons	Location	Dimension	Unfactored Ratio LL/DL	Rating Factor	Tons				Location
Operating (Op)	HS-20	36.0	1.30	1.30											O.R. (64) (Gov Span)	0.0
			1.30	1.30											HS20 O.R. Max Span	-1.0
			2.17	1.30											Inventory Rating (66)	0.0
Operating (Strength)	SU2	17.0	1.30	1.30										Single Unit Truck 2 Axles	-1.0	
	SU3	33.0	1.30	1.30										Single Unit Truck 3 Axles	-1.0	
	SU4	35.0	1.30	1.30										Single Unit Truck 4 Axles	-1.0	
	C3	28.0	1.30	1.30										Comb. Unit Truck 3 Axles	-1.0	
	C4	36.7	1.30	1.30										Comb. Unit Truck 4 Axles	-1.0	
	C5	40.0	1.30	1.30										Comb. Unit Truck 5 Axles	-1.0	
	ST5	40.0	1.30	1.30										Truck Trailer 5 Axles	-1.0	

Notes	Comments
<p><b>General Notes</b> 1. This table is based on the requirements established in the 2xxx "Bridge Load Rating Manual".</p> <p><b>Part A Notes</b> 2. Permit Capacity is determined by using the permit vehicle in all lanes.</p> <p>3. If the Design Operating Load Rating is greater than 1.4, Load Rating using Legal Vehicles SU2, SU3, SU4, C3, C4, C5, and ST5 is not required.</p> <p>4. Does the depth of fill above the top slab exceed the span length between the inside faces of the end walls (bridge culvert total span length)?                      ___ Yes ___ No (If Yes, then the live load may be neglected per LRFD 3.6.1.2.6)</p> <p><b>Notes to Designer</b> 5. Modify or replace the Rating Location Sketch showing Span Length(s) to resemble the bridge being rated.</p> <p><b>Additional Notes</b> 6. For each vehicle in the table, state whether the rating is for the interior or exterior member and whether or not that member governs.</p> <p>7. Cells shaded in this color will automatically populate based upon data provided in other fields (rating factor, bridge #, etc.) on this form.</p> <p>Bridge Load Rating Manual &amp; Bridge Management System (BMS) Coding Guide are available at:  <a href="http://www.fdot.state.fl.us/statemaintenanceoffice/Structures/Operations.shtml">http://www.fdot.state.fl.us/statemaintenanceoffice/Structures/Operations.shtml</a></p>	<p>HS20 (O.R.) (Gov)</p> <p>HS20 (O.R.) (Max)</p> <p>HS20 (I.R.)</p> <p>SU2</p> <p>SU3</p> <p>SU4</p> <p>C3</p> <p>C4</p> <p>C5</p> <p>ST5</p> <p>E.G. DF method if other than LRFD, other appropriate comments, etc.</p>

PONTIS Information		Structure Number (8)			P.E. Information		
Load Rating Date	Reason for LR				Performed By/Date		
Initials	Load Rating Origination				Checked By/Date		
Load Distribution Factor	Design Method				P.E. & FL P.E. Lic. #		
Impact Factor	Method of Calculation				Physical Address:		
Design Load (31)					Email Address:		
Operating Type (6-3)					P.E. SEAL:		
Inventory Type (65)							
Main Type Material (43A)							
Main Type Design (43B)	[19] Culvert (includes frame culverts)						
Approach Type Material (44A)							
Approach Type Design (44B)							
Culvert Type							
Open/Posted/Closed (41)							
Posting (70)	[5] A TABOVE LEGAL LOADS (1,000 up) (Not Required)						
Posting Date	Recommend	SU	99.0 tons	C	99.0 tons	T	99.0 tons
Spans in Main Unit (45)	0						
Approach Spans (46)	0						
HS20 Gov Span Length	0.0 ft	Operating Rating (64) (Gov)	0.0 tons	HS20 O.R. Max Span	-1.0 tons		
Length of Max Span (46)	0.0 ft	Inventory Rating (66)	0.0 tons	Single Unit Truck 2 Axles	-1.0 tons		
Structure Length (49)	0.0 ft	Single Unit Truck 3 Axles	-1.0 tons	Single Unit Truck 4 Axles	-1.0 tons		
Total Length	0.0 ft	Comb. Unit Truck 3 Axles	-1.0 tons	Comb. Unit Truck 4 Axles	-1.0 tons		
		Comb. Unit Truck 5 Axles	-1.0 tons	Truck Trailer 5 Axles	-1.0 tons		

